


Jet Propulsion Laboratory  
California Institute of Technology

# Advanced Energy Storage Technologies for Future NASA Planetary Science Missions

Rao Surampudi, Marshall Smart, Kumar Bugga, Erik Brandon,  
John Elliott, Patricia Beauchamp


*NASA Jet Propulsion Laboratory, California Institute of Technology*

April 26, 2018




# Outline

- Study Overview
- PSD Mission Needs
- State of Practice of Energy Storage Systems
- Advanced Energy Storage Systems under Development
- Summary of Findings & Recommendations




# Study Overview



# Study Objectives

## Energy Storage Technology Assessment

- Review the energy storage system needs of future planetary science missions
- Assess the capabilities and limitations of state of practice energy storage systems to meet the needs of future planetary science missions.
- Assess the status of advanced energy storage technologies currently under development at NASA, DOD, DOE and Industry and assess their potential capabilities and limitations to meet the needs of future planetary science missions.
- Assess the adequacy of on-going technology development programs at NASA, DoD, DOE and Industry to advance energy storage technologies that can meet the needs of future planetary science missions.
- Identify technology gaps and technology programs to meet the needs of future planetary science missions.



# Review Team

## Energy Storage Technology Assessment

- Rao Surampudi, NASA-JPL
- Julian Blosiu, NASA-JPL
- Marshall Smart, NASA-JPL
- Ratnakumar Bugga, NASA-JPL
- Eric Brandon, NASA-JPL
- John Elliott, NASA-JPL
- Julie Castillo, NASA-JPL
- Thomas Yi- NASA-GSFC
- Leonine Lee, NASA-GSFC
- Mike Piszczor, NASA-GRC
- Ed Plichta, US Army
- Thomas Miller/Concha Reid, NASA GRC
- Simon Liu, Aerospace
- Chuck Taylor, NASA HQ
- Christopher Iannello, NASA HQ

Jet Propulsion  
Laboratory



Goddard Space Flight  
Center




Glenn Research  
Center



NASA -HQ





# Presenters

## Batteries


- ENERSYS
- Eagle Picher / Yardney  
Technical Products
- Amprius
- LMA
- Boeing
- SAFT
- University of Maryland
- SKC Power Technologies

## Fuel Cells

- Giner
- Infinity
- Teledyne
- Proton

## NASA/DOD/DOE

- NASA-GRC
- NASA-JPL
- NASA-GSFC
- Aerospace Corporation
- Navy Research Laboratory (NRL)
- Applied Physics Laboratory (APL)
- DOE



# Energy Storage System Needs of Next Decadal Planetary Science Missions



# Planetary Science Mission Destinations

©2007 Pearson Education, Inc.

### Outer Planets



Jupiter	Saturn	Uranus	Neptune
Distance from Sun = 5.20 AU	Distance from Sun = 9.54 AU	Distance from Sun = 19.2 AU	Distance from Sun = 30.1 AU
Mass = 318 $M_{Earth}$	Mass = 95 $M_{Earth}$	Mass = 14 $M_{Earth}$	Mass = 17 $M_{Earth}$
Density = 1.33 $g/cm^3$	Density = 0.71 $g/cm^3$	Density = 1.24 $g/cm^3$	Density = 1.67 $g/cm^3$
Composition: mostly H, He	Composition: mostly H, He	Composition: H compounds, rock, H and He	Composition: H compounds, rock, H and He

Earth

Io, Europa, Ganymede, Callisto

Mars, Phobos, Deimos, Venus, Mercury

Color: Robert H. Goddard Space Flight Center

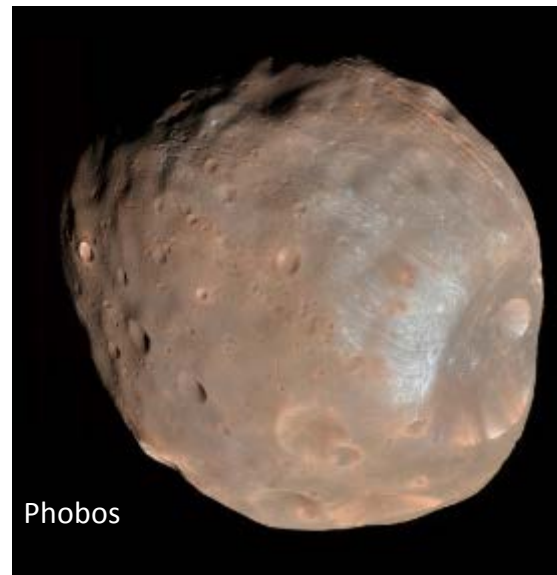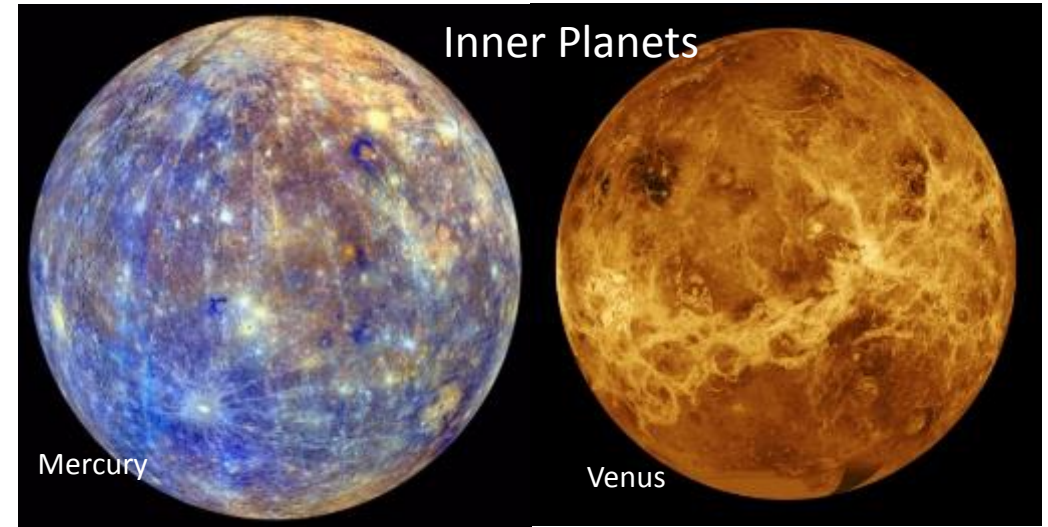

### Small Bodies

 Dwarf Planets	 Asteroids
 Comets	 Meteors/ Meteorites





# Classification of Planetary Science Missions Based on Mission Type



Voyager-1

Flyby (RPS/PV)




MRO

Orbiter (RPS/PV & chemical)




DAWN

Electric Propulsion  
(PV/NEP& Chemical)



INSPIRE

Cubesat  
(PV & Chemical)

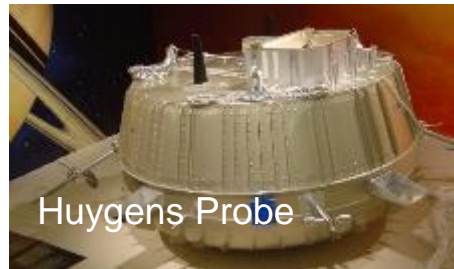


Huygens Probe

Probes (Chemical)



Phoenix

Lander  
(PV & Chemical)

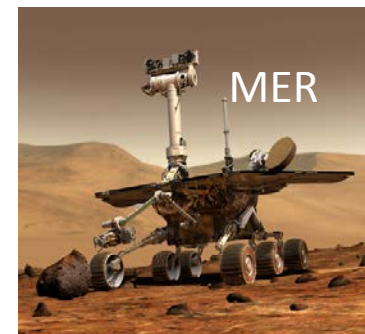

MER

Rover (RPS/PV & Chemical)



Aerial (PV & Chemical)



# Potential Next Decadal Outer Planet Missions

- Ocean Worlds


- Europa
- Enceladus
- Titan



- Icy Giants


- Uranus
- Neptune

MRO

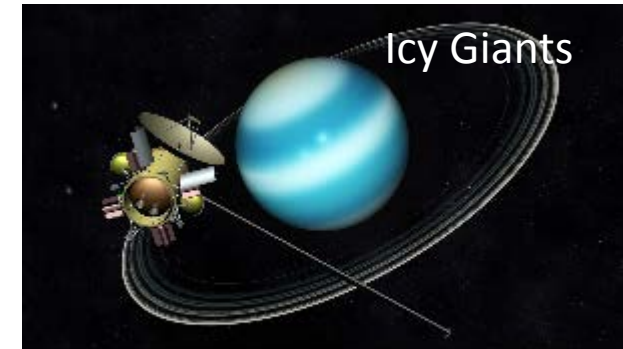

- Giant Planets

- Jupiter
- Saturn

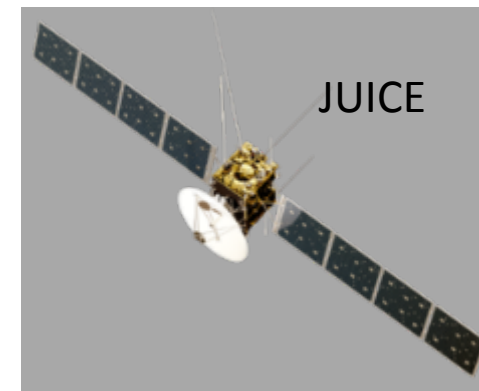

Artist's  
Concepts



# Energy Storage System Needs for Future Outer Planetary Mission Concepts

- Primary Batteries/Fuel cells for planetary landers/probes: High Specific Energy ( $> 500 \text{ Wh/kg}$ ), Long Life ( $> 15$  years), Radiation Tolerance & Sterilizable by heat or radiation
- Rechargeable Batteries for flyby/orbital missions: High Specific Energy ( $> 250 \text{ Wh/kg}$ ), Long Life ( $> 15$  years), Radiation Tolerance & Sterilizable by heat or radiation.
- Low temperature Batteries for Probes and Landers:
  - Low Temperature Primary batteries ( $< -80\text{C}$ )
  - Low Temperature Rechargeable Batteries ( $< -60 \text{ C}$ )



Europa Orbiter



Uranus/Neptune missions




Artist's  
Concepts

Europa Lander 11



# Mars Mission Concepts – 2020s and Beyond

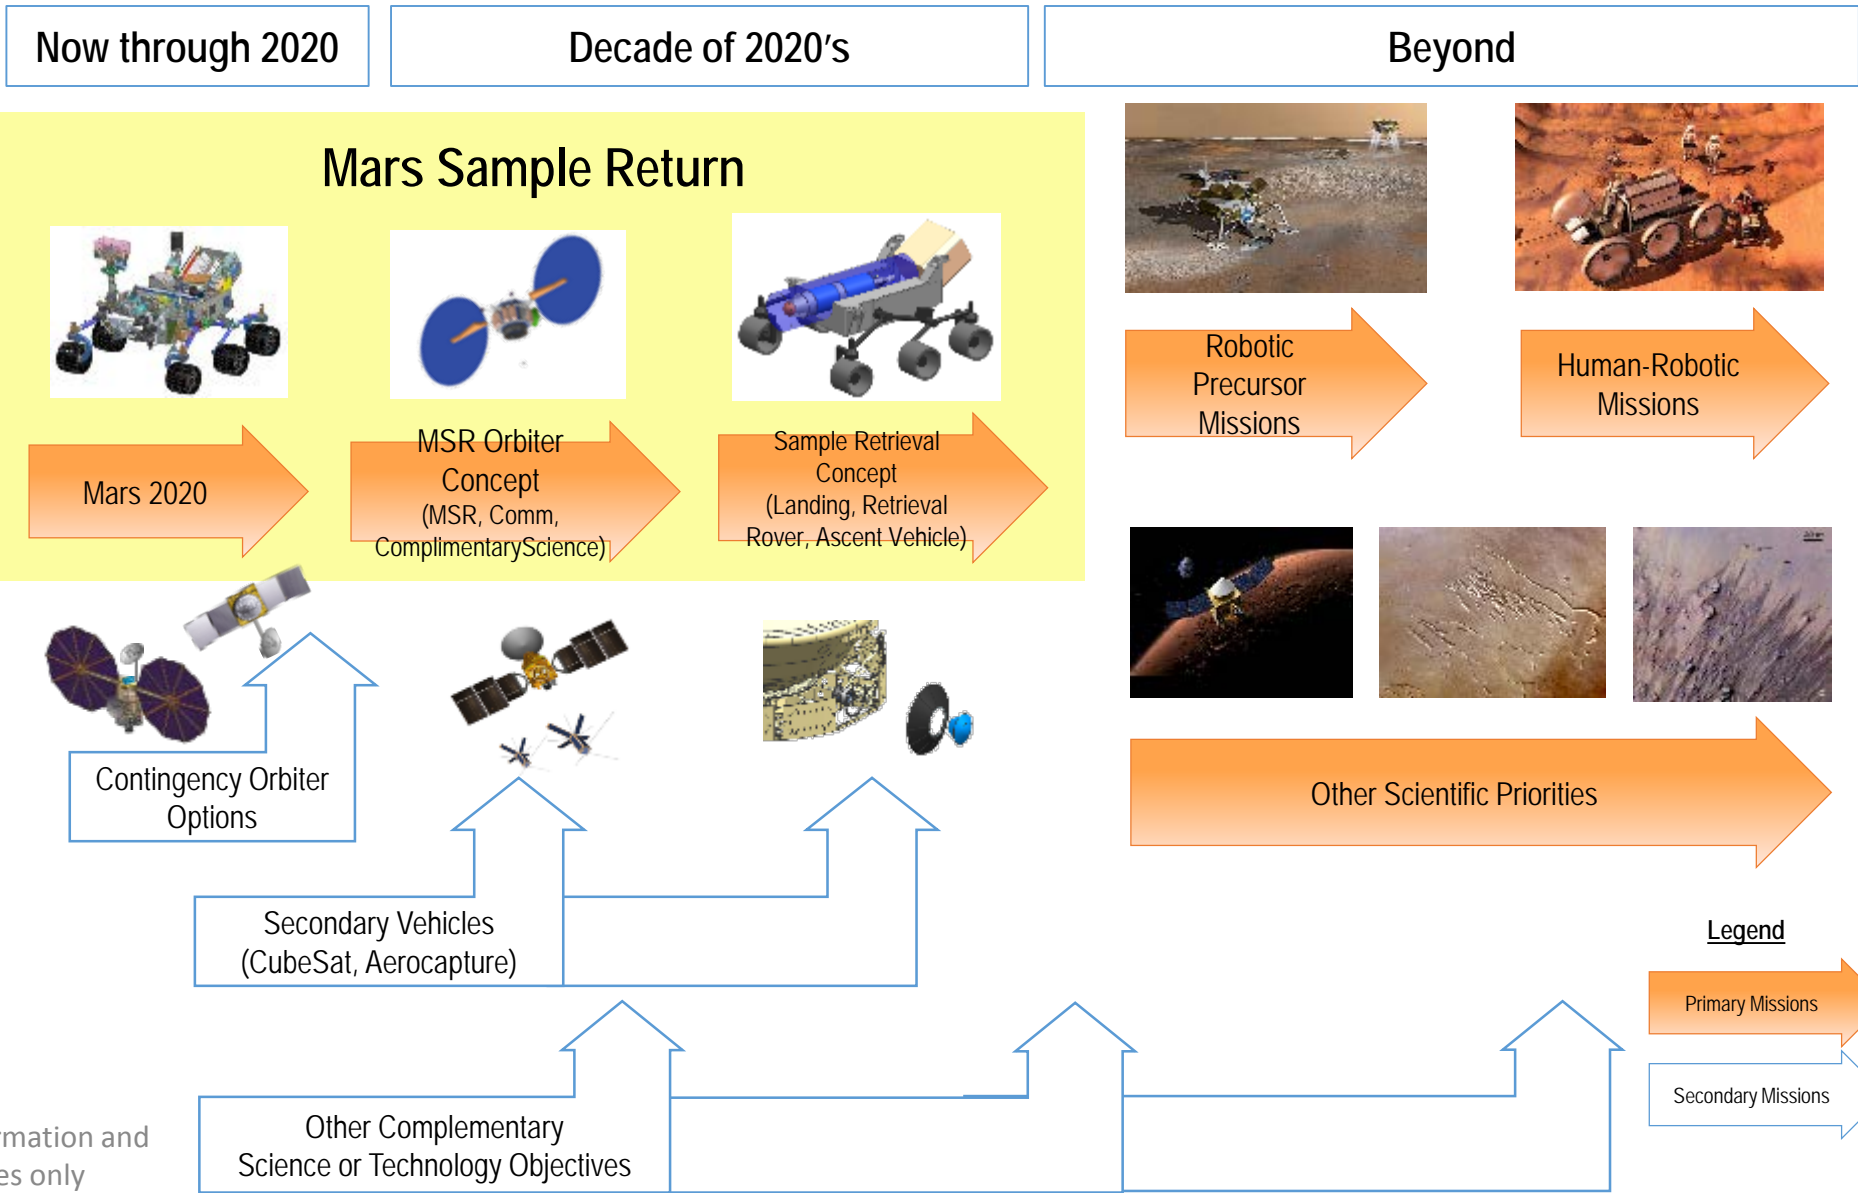

Pre-decisional: for information and discussion purposes only



# Energy Storage System Needs for Future Mars Mission Concepts

- **Rechargeable Batteries for Orbital Missions:**


- High Specific Energy ( $> 250 \text{ Wh/kg}$ ), Long Life ( $> 15 \text{ years}$ )  
Long Cycle Life ( $> 50,000 \text{ cycles @ } 30\% \text{DOD}$ ),

- **Rechargeable Batteries for Surface Missions:**


- High Specific Energy ( $> 250 \text{ Wh/kg}$ ), Low Temperature Operation ( $-40 \text{ C}$ ), Long Cycle Life ( $> 3000$ ), Sterilizable by heat or radiation

- **Rechargeable Batteries for Aerial Missions:**

- High Specific Energy ( $> 250 \text{ Wh/kg}$ ), High Power Density ( $> 3 \text{ kW/kg}$ ), Low Temperature Operation ( $-40 \text{ C}$ )

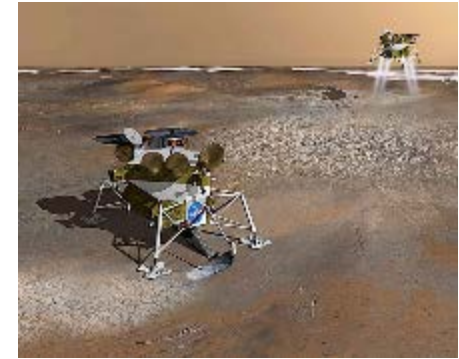

Robotic Precursor Missions

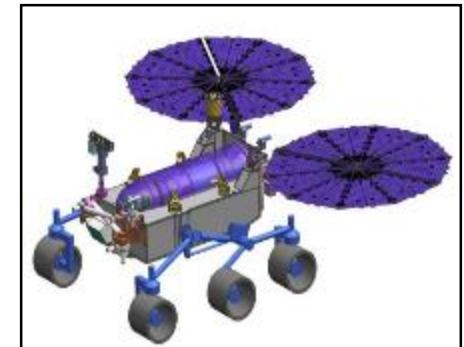

Mars Sample Return Concept




Mars Aerial Vehicle



# Potential Venus Mission Concepts

**Upper  
Atmosphere 50 to  
70 Km**

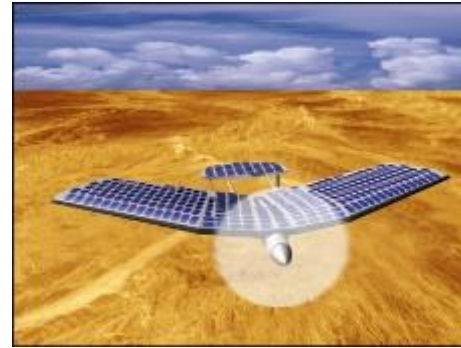

**Mid and Lower  
Atmosphere 50 to  
0 Km**



**Surface**



**Near Term**

**Mid Term**

**Long Term**



# Energy Storage System Needs for Inner Planetary Mission Concepts



## Primary Batteries/Fuel Cells for Surface Probes:

High Temperature Operation ( $> 465\text{C}$ ), High Specific Energy ( $>400 \text{ Wh/kg}$ ), Operation in Corrosive Environments



## Rechargeable Batteries for Aerial Platforms:

High Temperature Operation ( $300\text{-}465\text{C}$ ), Operation in Corrosive Environments, Low-Medium Cycle Life, High Specific Energy ( $>200 \text{ Wh/kg}$ ), Operation in High Pressures

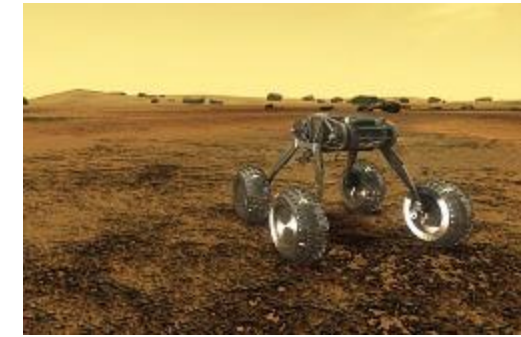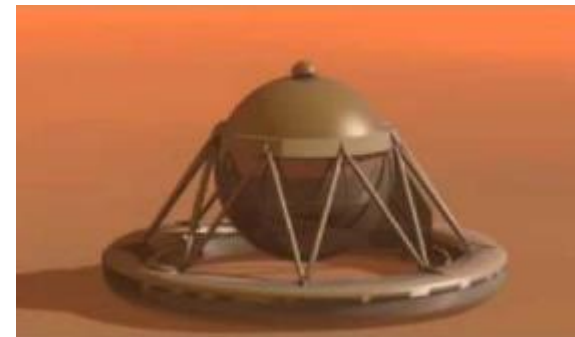



# Potential Next Decadal Small Body Mission Concepts

- Flagship Mission:
  - Cryogenic Comet Nucleus Sample Return – explicitly stated in *Vision and Voyages*
- Possible New Frontiers or Discovery
  - Trojan Tour and Rendezvous
  - Follow up to Dawn mission with Ceres lander
  - Themis, Hygiea, Pallas of interest after Dawn visiting Vesta and Ceres
  - *Follow-on mission to the Kuiper Belt?*



Main Belt Sample Return Mission



PSYCHE





LUCY





# Energy Storage System Needs for Future Small Body Mission Concepts

- **Primary Batteries/Fuel cells for Surface Missions:**  
High Specific Energy ( $> 500 \text{ Wh/kg}$ ), Long Life ( $> 15$  years), Radiation Tolerance & Sterilizable by heat or radiation
- **Rechargeable Batteries for Orbital/Flyby Missions:**  
High Specific Energy ( $> 250 \text{ Wh/kg}$ ), Long Life ( $> 15$  years), Long Cycle Life ( $> 50,000$  cycles @ 30%DOD), Radiation Tolerance & Sterilizable by heat or radiation

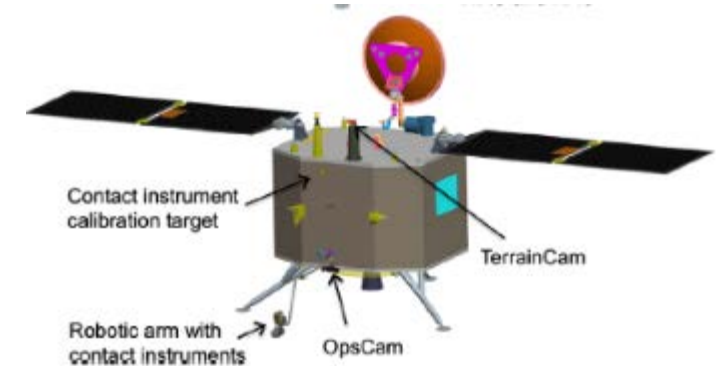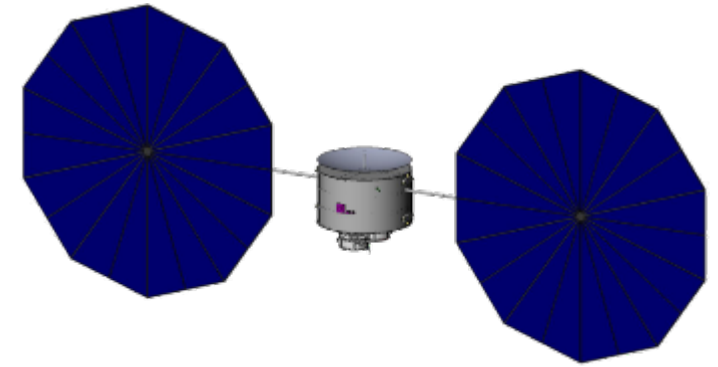

# SOP Energy Storage Systems

# SOP Energy Storage Systems


## Primary Batteries




## Capacitors



## Rechargeable Batteries




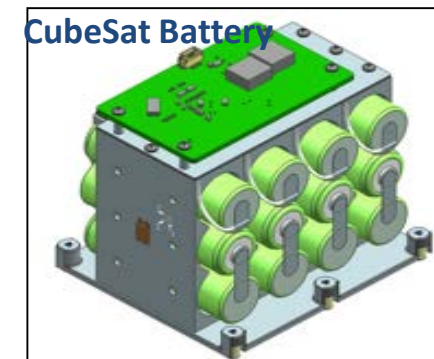


# Planetary Missions Powered by Primary Batteries


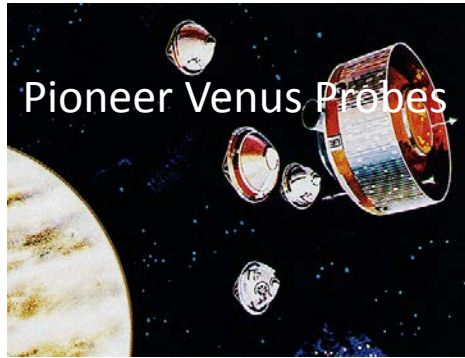




# PSD Missions that used Rechargeable Batteries

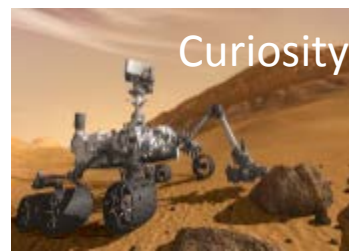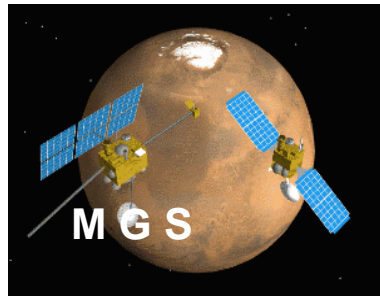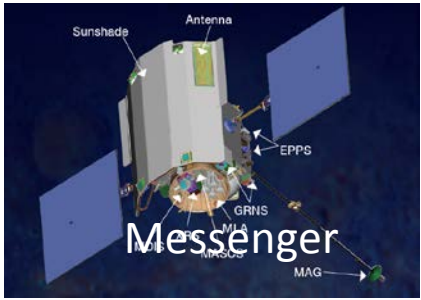


# PSD Missions Powered by Li-Ion Batteries Based on Large Format Cells

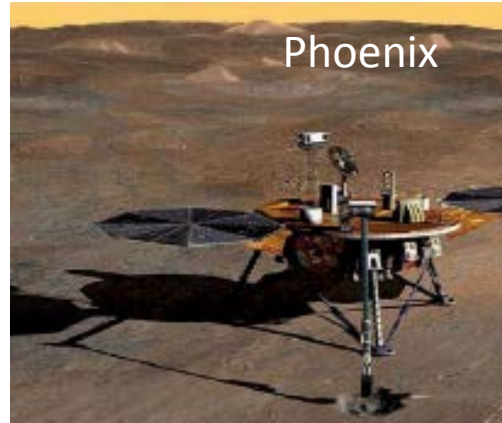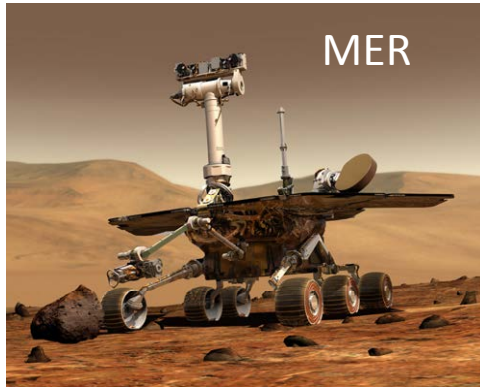

# PSD Missions Powered by Li-Ion Batteries Based on Small Format Cells


**PROBA (2001)**

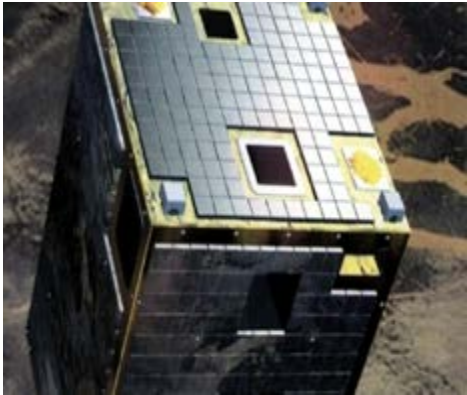

**Mars Express (2003)**



**Kepler (2009)**

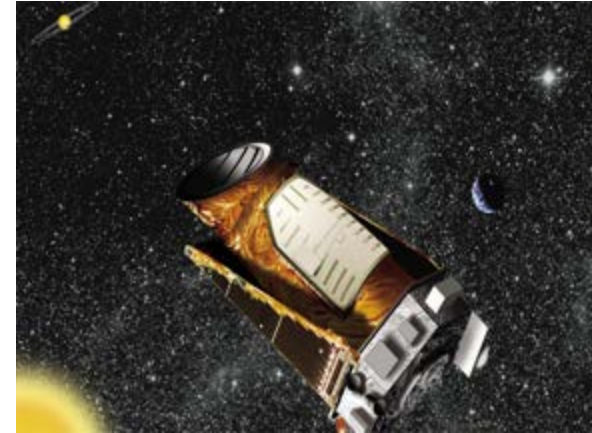


**Aquarius (2011)**




**NuSTAR (2012)**



**SMAP (2014)**

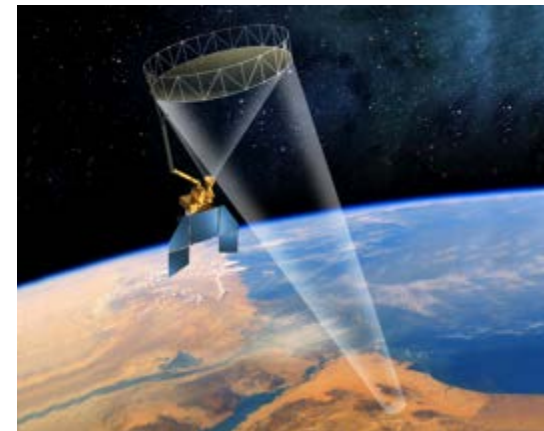




## SOP Capabilities vs Future PSD Mission Needs


Technology	Capability Required	SOP Technology Capability
Low Temperature Primary Batteries	<-80 C Operation, Radiation Tolerance (~20 M Rads)	> -40 C
High Temperature Primary Batteries	> 450 C Operation,	< 70° C
High Specific Energy Primary Batteries	> 500 Wh/kg, 1000 Wh/l	150-250 Wh/kg, 350 Wh/l
Long Calendar Life Rechargeable Batteries	> 15 years, 250 Wh/kg, Radiation Tolerance	10 years, 100 Wh/kg
Long Cycle Life Rechargeable Batteries	> 50 K cycles @ 30% DOD > 250 Wh/kg at 100% DoD	> 40 K cycles @ 30% DOD > 100 Wh/kg at 100% DoD
Low Temperature Rechargeable Batteries	< -60 C operation,	< -20° C

- Future planetary science missions require energy storage technologies that are mass and volume efficient have long life and operate under extreme environments.
- SOP aerospace batteries are heavy, bulky and have limited operational capabilities at extreme environments





# Advanced Energy Storage Technologies



# Advanced Energy Storage Technologies Under Development-Overview

- **Primary Batteries**

- Li-CFX Batteries
- Li-CFx/MnO<sub>2</sub> Batteries
- Li-O<sub>2</sub> batteries

- **Rechargeable Batteries**

- Advanced Li-Ion batteries
- Li-Solid state Batteries
- Li-Polymer Batteries
- Li-Sulfur Batteries

- **High Temperature Batteries**


- Li-FeS<sub>2</sub> Thermal Batteries
- Na-S/Na-MCL<sub>2</sub> Rechargeable Batteries

- **Capacitors**


- Supercapacitors

- **Fuel Cells**


- PEM Fuel Cells
- Solid oxide Fuel Cells
- Regenerative Fuel Cells




# Advanced Primary Batteries

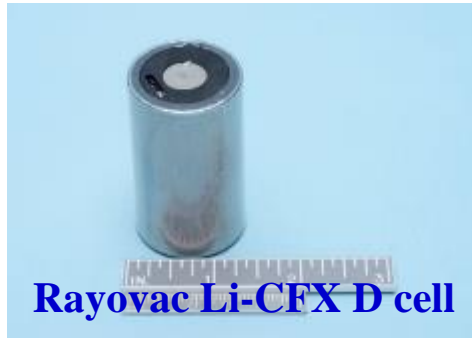

Battery Level	SOP	Adv. Li-CF <sub>x</sub>	Adv. Li-CF <sub>x</sub> MnO	Adv. Li-O <sub>2</sub>	
Specific Energy (Wh/kg)	150-250	400-500	350-450	500-600	
Energy Density (Wh/L)	250-400	600-800	550-600	700-800	
Shelf life (Years)	>10	>10	>10	5	
Operating Temperature	-40 to +60°C	-30 to +60°C	-40 to +60°C	-20 to +60°C	
TRL	9	4	4	3	



# Advanced Rechargeable Batteries

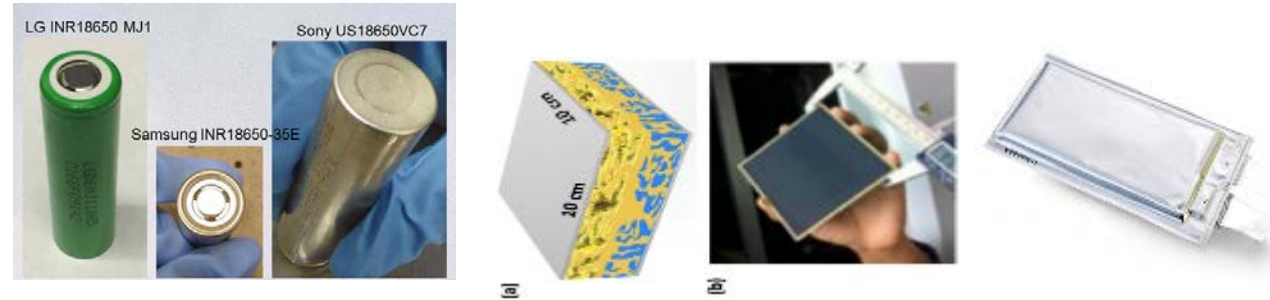


~260 Wh/kg and >700 Wh/l 18650 cells (some with Si on the anode)




Li-Solid State Cells

Li-S Cells

Battery Level	SOP Li-ion	Adv. Li-Ion	Adv. Solid State	Advanced Li-S
Specific Energy (Wh/kg)	90-110	> 150	250-350	<b>250-300</b>
Energy Density (Wh/L)	150	200-300	<b>400-500</b>	<b>300-350</b>
Cycle Life (100% DOD)	~2,000	> 50,000	>10,000	<b>100-500</b>
Calendar Life (Years)	5-10	>20	>20	< 5
Operating Temperature	<b>-20 to +30°C</b>	-10 to +25°C	<b>10 to +80°C</b>	<b>-30 to +30°C</b>
TRL		4	<b>2-3</b>	<b>3</b>




# High Temperature Batteries

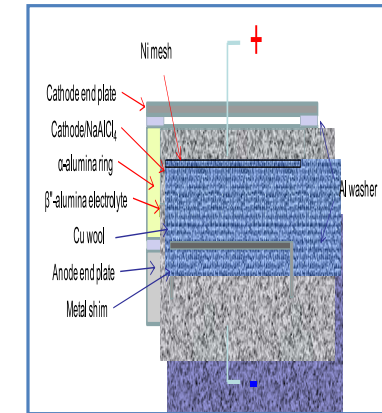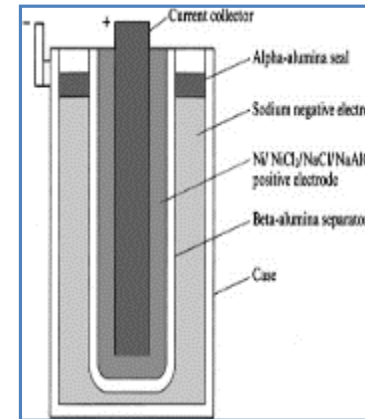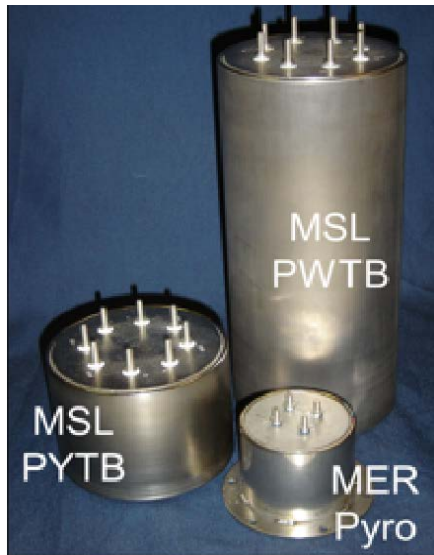

Sodium-Nickel Chloride batteries

Battery Level	SOP Primary	Primary Li-FeS <sub>2</sub>
Specific Energy (Wh/kg)	150-250	> 100
Energy Density (Wh/L)	250-350	200
Shelf life (Years)	>10	Reserve Design
Operating Temperature	-40 to +60°C	350 to +450°C

Battery Level	SOP	HT Rechargeable
Specific Energy (Wh/kg)	90-110	100
Energy Density (Wh/L)	150	150
Cycle Life	~2000	~1000
Shelf life (Years)	>10	5
Operating Temperature	-40 to +60°C	250 to +400°C




# Capacitors



Metric	Supercapacitors	Li-Ion Capacitors	Advanced
Voltage	3	3.5	4
Maximum Capacity (F)	>3000	>3000	>3000
ESR (mΩ)	0.28	0.5	0.5
Specific Energy (Wh/kg)	6	14	20
Specific Power (kW/kg)	>15	15	>15
Calendar Life	>10	>10	>10
Cycle Life	10 <sup>6</sup>	10 <sup>6</sup>	10 <sup>6</sup>
Operating Temperature	-40 to +60°C	-20 to +60°C	-100 to +150°C






## Summary of Findings & Recommendations



# Key Findings


- Next decadal planetary science mission concepts have unique energy storage system needs
  - Low temperature batteries (primary (<math><-80^{\circ}\text{C}</math>) and rechargeable (<math><-60^{\circ}\text{C}</math>) batteries ) for planetary probes and Mars surface missions
  - High temperature batteries (> 475°C) for inner planetary missions
  - Long calendar life (>15 years), high specific energy (>250 Wh/kg) & radiation tolerant rechargeable batteries for outer planetary missions
  - High specific energy (>250 Wh/kg) and Long cycle life (>50,000 cycles) rechargeable batteries for Mars and planetary orbital missions
  - High specific energy primary batteries (>600 Wh/kg) for planetary probes
- SOP batteries are not attractive to meet the unique needs of future planetary science missions.
  - Limited life ( 5-10 years )
  - Limited operating temperature range (-20oC)
  - Radiation tolerance poorly understood
  - Heavy and bulky ( 100 Wh/kg for rechargeable, 250 Wh/kg for primary batteries)
- Several changes are happening in Li-Ion Battery industry. Implications of these changes on future NASA missions is uncertain
  - Yardney, the supplier of large format Li-Ion cells/batteries was acquired by Eagle Pitcher Industries. It is not known if Eagle Pitcher will continue to offer these products
  - ABSL , the supplier of small format Li-Ion cells/batteries was acquired by ENERSY and the heritage Sony HC cells have been discontinued.
- Advanced energy storage systems are under development at several companies and universities with support from DOD and DOE funding
  - Primary Batteries: Li-CFx (400-450 Wh/kg), Li-CFx-MnO<sub>2</sub> (350-450 Wh/kg)
  - Rechargeable Batteries: Li-Ion (125-150 Wh/kg), Li-solid state (250-350 Wh/kg) , Li-S (250-350 Wh/kg)
  - Fuel Cells: PEM Fuel Cells (500 Wh/kg)
  - Capacitors:





## Overall Recommendations

- Make *targeted* investments in specific energy storage technologies that will enable and enhance the capabilities for next generation/decadal planetary science mission concepts.
- Establish and maintain partnerships with HOEMD and STMD and/or other government agencies such as DoE and DoD (AFRL and ARL) to leverage/tailor the development of advanced energy technologies future planetary science mission concepts.
- Upgrade the existing infrastructure and resources for energy storage technology development, testing and qualification at various NASA Centers as needed to support future planetary science mission concepts.



## Specific Recommendations

- Even though some of the requirements are common with the DoE and DoD needs, many of them are different due to the unique PSD environments. Therefore, NASA PSD needs to undertake its own technology program, while leveraging the DoE and DoD efforts. Specifically, PSD should advance and/or continue to develop:
  - High specific energy ( $\sim 250$  Wh/kg) and long life (50,000 cycles and 15 years) *rechargeable* batteries required for future orbital mission concepts.
  - High specific energy *rechargeable* batteries ( $>250$  Wh/kg @RT) with low temperature operational capability (150 Wh/kg @ $<-40^{\circ}\text{C}$ ) required for future planetary surface mission concepts.
  - High specific energy *primary* batteries and/or *primary fuel cells* ( $>500$  Wh/kg) required for outer planetary probes and Ocean World landers.
  - High specific energy *primary* batteries ( $>500$  Wh/kg@RT) with low temperature operational capability (300 Wh/kg @ $<-60^{\circ}\text{C}$ ) required for future planetary outer planetary probes and Ocean World landers.
  - High temperature ( $460^{\circ}\text{C}$ ) *primary and rechargeable* batteries required for Venus surface mission concepts.



# Acknowledgements

This work presented here was carried out at the Jet Propulsion Laboratory, California Institute of Technology under a contract with National Aeronautics and Space Administration.

© 2018 California Institute of Technology.  
Government sponsorship acknowledged

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not constitute or imply its endorsement by the United States Government or the Jet Propulsion Laboratory, California Institute of Technology.



Backup

# Capacitors



Metric	Supercapacitors	Li-Ion Capacitors	Advanced
Voltage	3	3.5	4
Maximum Capacity (F)	>3000	>3000	>3000
ESR (mΩ)	0.28	0.5	0.5
Specific Energy (Wh/kg)	6	14	20
Specific Power (kW/kg)	>15	15	>15
Calendar Life	>10	>10	>10
Cycle Life	10 <sup>6</sup>	10 <sup>6</sup>	10 <sup>6</sup>
Operating Temperature	-40 to +60°C	-20 to +60°C	-100 to +150°C



# Fuel Cells:

## Proton Exchange Membrane (PEM) Fuel Cells

### Technology Status:

- Significant work by NASA and DOD (Navy, Air Force, MDA) to develop hydrogen-oxygen fuel cells. Prototype hardware passed vibration load testing at EUS flight qualification levels\*
- Department of Energy (DOE) focus is on the development of hydrogen-air fuel cells (not applicable to NASA SMD).

### Advantages:

- High specific energy (>500 Wh/kg at the system level)
- Heat can be used for thermal management
- Options for operating hydrogen from propellants and *in situ* resources
- Potential for compatibility with DHMR planetary protection protocols, and radiation tolerance

### Mission Applications


- Long duration (>1 month) outer planets/Ocean Worlds landers

### Technical Issues to address

- Reducing balance of plant (mass/power/volume/complexity)
- Demonstrate long life operation

### Active Players

- Infinity, Teledyne, ElectroChem, Giner

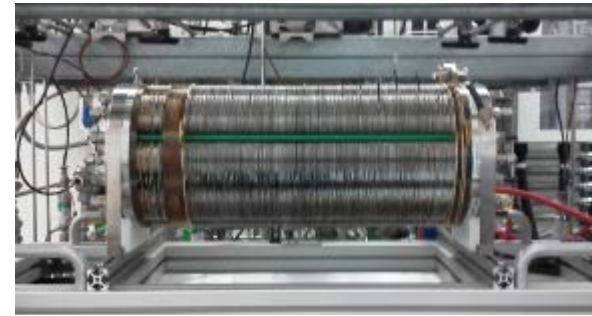

Infinity NFT stack



Teledyne stack

### Potential Capabilities

Metric	PEM
Stack power density (W/kg)	>100
MEA voltage efficiency (200 mA/cm <sup>2</sup> )	72%
System Efficiency	65%
Maintenance Free Operating Life (hours)	10,000



AMPS NFT fuel cell power module during field demonstration

\* Stack pressurized with inert gas during vibration testing

# Fuel Cells

## Regenerative Fuel Cell (RFC)

### Technology Status

- Aerospace applications include load balancing in hybrid electric aircraft (Boeing) and large airships (Lockheed-Martin)
- Few air-independent systems demonstrated; mainly lab-scale demonstrations
- System designs highly application-specific
- TRL 2-3 at system level (TRL 4-5: Demonstrated at stack level)

### Advantages:

- Can be coupled with ISRU and propellant loops (oxygen, hydrogen, water)
- Waste heat can be used for thermal management
- Potential for compatibility with DHMR planetary protection protocols, and radiation tolerance

### Mission Applications

- Human surface power (Lunar, Mars)
- Large mobility systems

### Technical Issues to address


- Reduced balance-of-plant complexity, mass and volume
- Increased round-trip efficiency

### Active Players

- **Fuel Cells:** Giner, Infinity, Proton, NASA, JAXA
- **Electrolyzers:** Giner, Proton, Sustainable Innovations
- **Systems:** Proton OnSite, JAXA



JAXA RFC used on Boeing demonstration



Conceptual design of a compact RFC for rover systems



Modular RFC concept for human surface operations



RFC test bed demonstration at NASA Glenn



Decoupled RFC demonstration at JPL Mars Yard (fuel cell on ATHLETE + remote hydrogen refueling station)

# Summary of Energy Storage Technology Needs for Future Planetary Science Missions


- General Needs:

- Reduced Mass & Volume by >50%
- Long Life (> 15 years)
- High reliability
- Safety

- Mission Specific Needs


- Outer Planetary Surface Missions: Ultra Low Temperature (< -60°C) Performance, Radiation Survivability, compliance with Planetary Protection Requirements
- Inner Planetary Aerial/Surface Missions: Survive High Temperature (> 450°C), high pressure, & Corrosive Environments
- Mars Aerial Missions: Wide Operating Temperature Capability (-60°C to +40°C), High Power Capability, Compliance with Planetary Protection Requirements
- Orbital Missions: Long Calendar and Cycle Life (>50,000 Cycles)





# Advanced Energy Storage Technology Summary of Findings

- Energy storage technology is continuing to evolve
  - Several advanced primary (Li-CFX, Li-CFx-MnO<sub>2</sub>) and rechargeable batteries (advanced Li-Ion, Li-solid state, Li-S), fuel cells (PEM) and capacitors (super capacitors) are being developed by DoD, DOE and universities.
  - The major performance drivers are : higher specific energy and higher energy density and low cost.
  - The present major pull for advanced energy storage technologies is consumer electronics and electric vehicles.
- Significant improvement in energy storage performance is envisioned
  - Primary Batteries: Li-CFX (400-450 Wh/kg), Li-CFx-MnO<sub>2</sub> (350-450 Wh/kg)
  - Rechargeable Batteries: Li-Ion (125-150 Wh/kg), Li-solid state (250-350 Wh/kg) , Li-S (250-350 Wh/kg)
  - Fuel Cells: PEM Fuel Cells (500 Wh/kg)
  - Capacitors:
- The biggest technology investments are mostly from DoE and DOD
  - Currently there is limited or no NASA funding in this area
- NASA needs to work with DOD and DOE to advance and tailor advanced energy storage technologies for future planetary science missions
  - To improve reliability and life
  - Improve operational capability in extreme environments

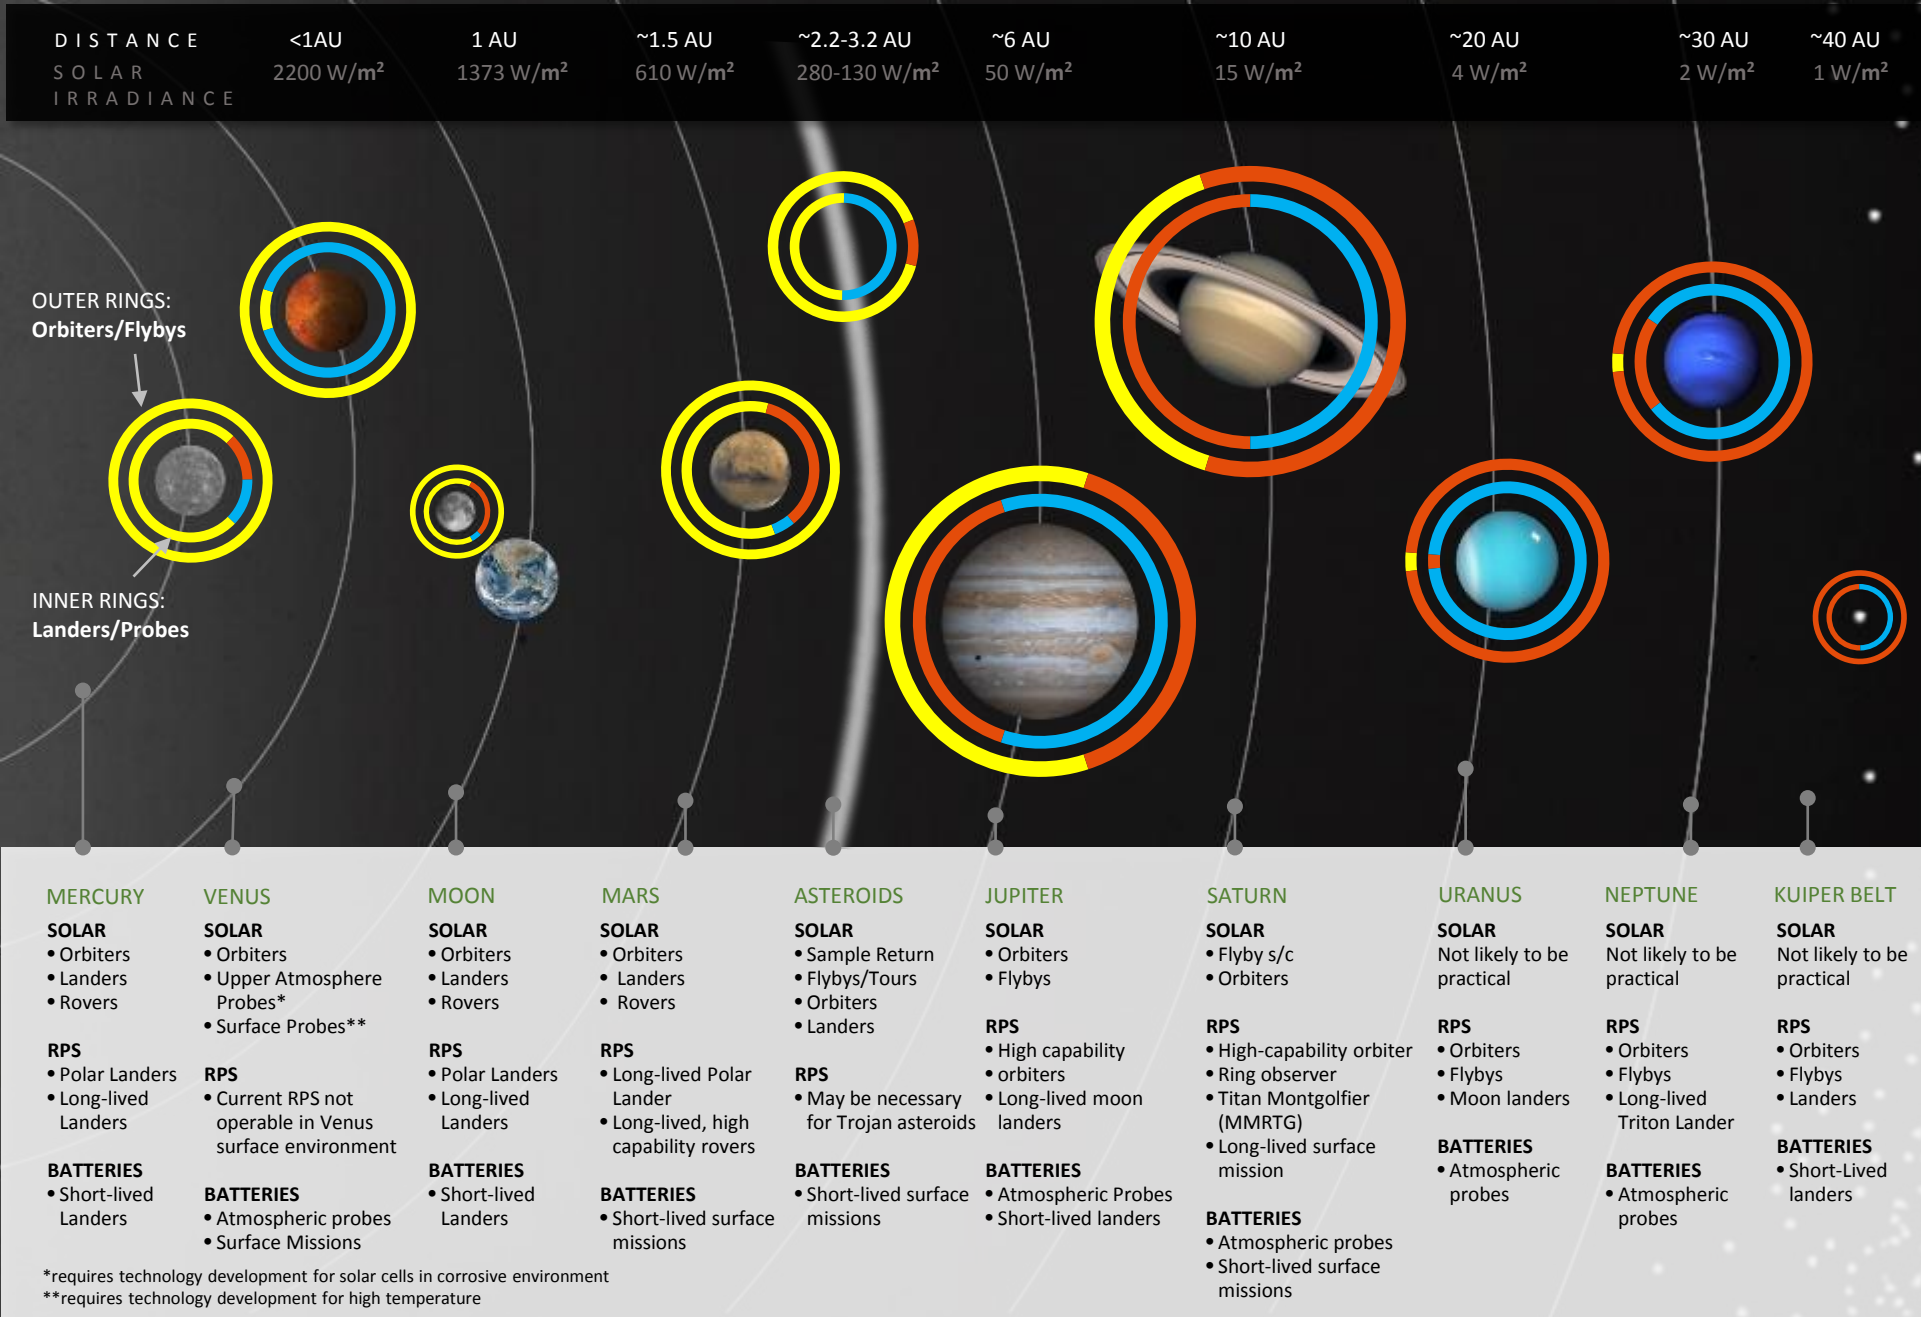

**POWER TECHNOLOGIES APPLICABLE TO SOLAR SYSTEM EXPLORATION MISSION CONCEPTS AS OF 2015<sup>(1)</sup>**

(1) Notional mission applicability based on expert opinion developed in JPL A-Team study in August, 2015. Updated 2017.

Pre-Decisional Information — For Planning and Discussion Purposes Only

- Solar/Rech. Batt
  - RPS
  - Primary Battery
- Approximate relative applicability of power technologies to target body missions*

# PSD Missions Powered by Primary Batteries





# Missions Needs & Candidate Advanced Energy Storage Technologies

Driving Mission Concepts	Capabilities Needed	Candidate Technologies
All flyby & orbital Missions	High specific energy (250 Wh/kg) long life & radiation tolerant rechargeable batteries (> 15 years)	Adv. Li-Ion Batteries Li-solid state batteries
Outer Planet Surface Missions	High specific energy Primary batteries and fuel cells	Adv. Li-CFx batteries Adv. Li-CFx/MnO <sub>2</sub> batteries PEM fuel cells
Inner planet surface missions	High temperature primary batteries (455 C) with high specific energy (250 Wh/kg)	Li-MS <sub>2</sub> batteries
Mars Surface Missions	Low temperature rechargeable batteries (-60 C)	Low temperature Li-Ion batteries
Outer Planet Aerial and Surface Missions	High temperature rechargeable batteries (475 C) with high specific energy (150 Wh/kg)	Adv. Li-CFx batteries Adv. Li-CFx/MnO <sub>2</sub> batteries PEM fuel cells




# Outer Planetary Mission Destinations

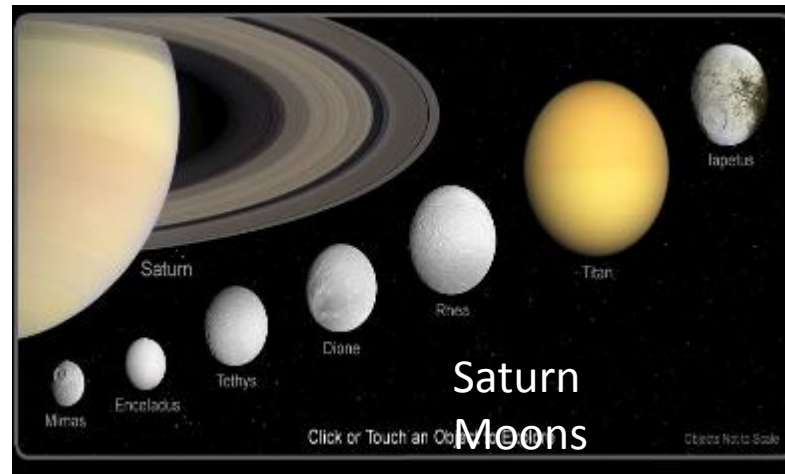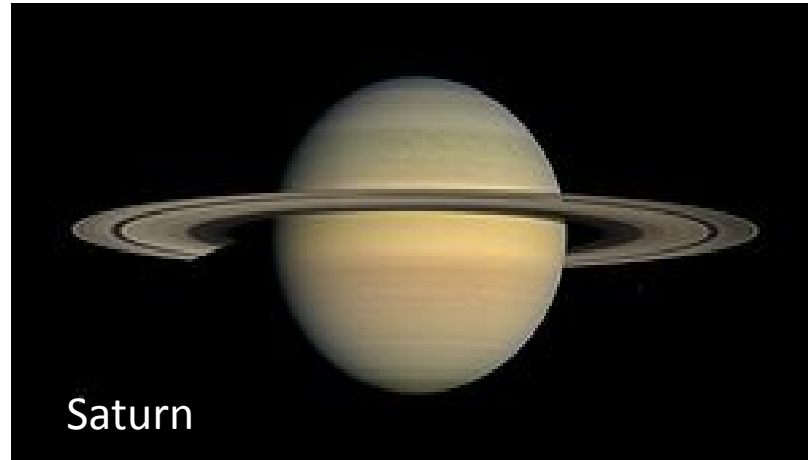




# Mars Mission Destinations

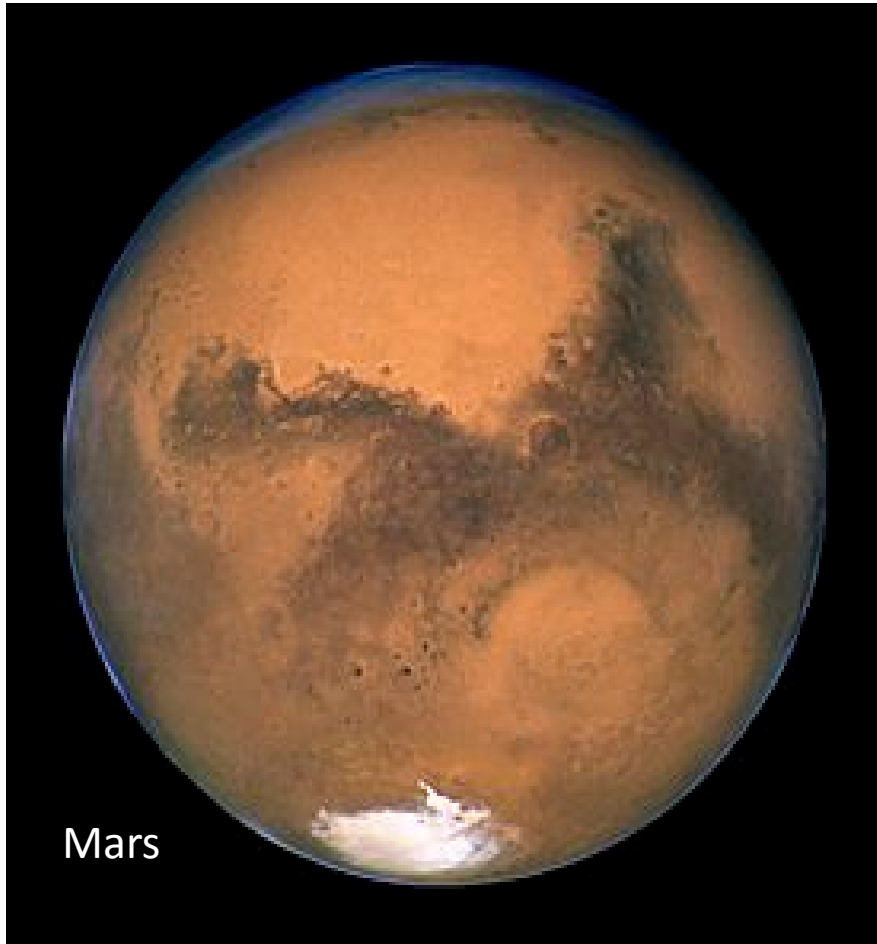




# Inner Planetary Mission Destinations

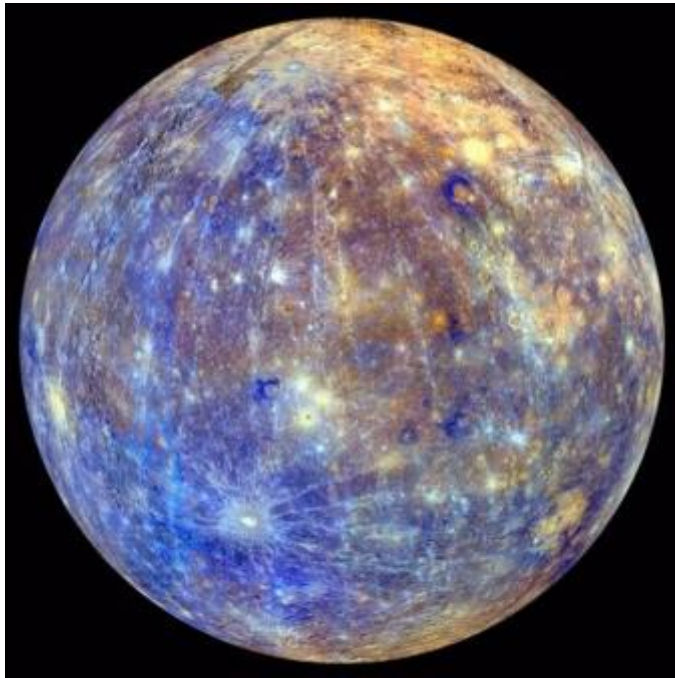





Mercury Solar day 176 Earth days




Venus Solar day 116 Earth days



# Small Bodies

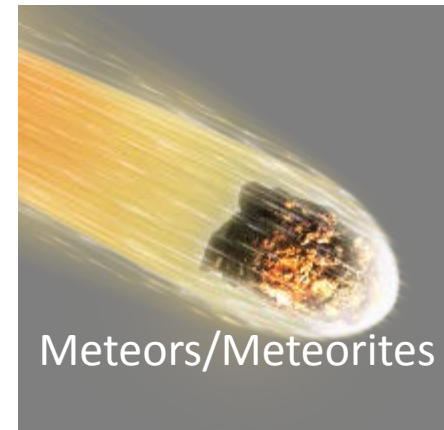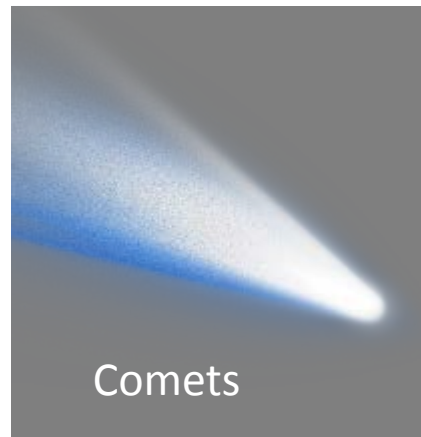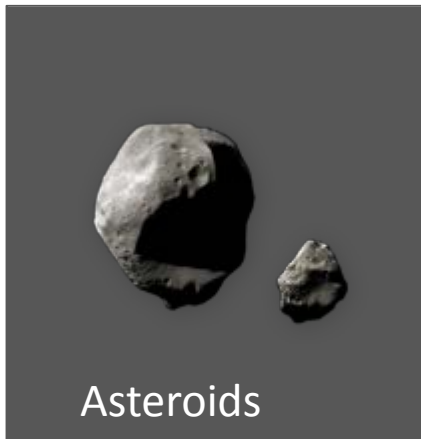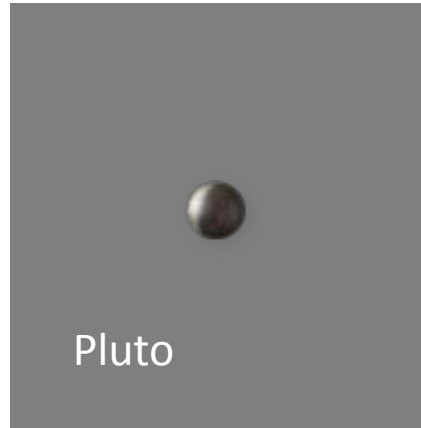






## Characteristics Of SOP Primary Batteries Used in Planetary Science Missions

Technology	Mission	Launch Date	Battery Configuration	Manufacturer	Cell Size, or Model	Capacity (Ah)	Operating Voltage Range	Battery Mass (kg)	Specific Energy (Wh/kg)	Operating Temperature Range (°C)	Calendar Life (Years)
Li-SO <sub>2</sub>	Stardust	2/7/99	4s2p	Saft America, Inc.	LO26SX	14	8V - 12V	1.2	130	- 20° to 40°C	9
Li-SO <sub>2</sub>	Genesis	8/8/01	8s2p	Saft America, Inc.	LO26SX	14	16V - 24V	2.06	150	- 20° to 40°C	5
Li-SO <sub>2</sub>	MER-Rover	6/10/03	12s5p	Saft America, Inc.	LO26SX	34	25V - 34V	7.55	155	0° to 60°C	3.5
Li-SOCl <sub>2</sub>	Deep Impact	1/12/05	9s24p	Saft America, Inc.	LSH20	312	24V - 32V	36.6	250	- 20° to 40°C	4

- Li-SO<sub>2</sub> & Li-SOCl<sub>2</sub> batteries continue to be used in various planetary surface missions.
- No major technical advances have happened in these battery technologies over the past decade.
- SAFT America is the only supplier of space-rated Li-SO<sub>2</sub> and Li-SOCl<sub>2</sub> batteries.
- SAFT was acquired by a new French company, (Total Inc.)




# Characteristics Of SOP Li-Ion Rechargeable Batteries

## Batteries Based on Large Format Prismatic Cells

Technology	Mission	Launch Date	Battery Configuration	Manufacturer	Cell Size, or Model	Capacity (Ah) Rated / Actual	Operating Voltage Range	Battery Mass (kg)	Specific Energy (Wh/kg)	Operating Temperature Range (°C)	Calendar Life (Years)	Cycle Life To Date
Li-Ion	<b>MER-Rover</b>	6/10/03	8s2p	Yardney	NCP-8-1	16 / 20	24V - 32.8V	7.1	90	- 20° to 30°C	14	5,000
Li-Ion	<b>Juno</b>	8/5/05	8s2p	Yardney	NCP-55-2	110 / 120	24V - 32.8V	34.9	110	15° to 25°C	7	< 50
Li-Ion	<b>Phoenix</b>	9/4/07	8s2p	Yardney	NCP-25-1	50 / 62	24V - 32.8V	17.8	105	- 20° to 30°C	4	< 200
Li-Ion	<b>Grail</b>	9/10/11	8s1p	Yardney	NCP-25-1	50 / 62	24V - 32.8V	9.3	100	0° to 30°C	3.5	1,500
Li-Ion	<b>MSL-Rover</b>	11/26/11	8s2p	Yardney	NCP-43-1	86 / 92	24V - 32.8V	26.5	104	- 20° to 30°C	7	> 1500

### Limitations of SOP Li-ion batteries:

- Heavy and bulky
- Limited operating temperature range (-20°C to 40°C)




# Characteristics Of SOP Li-Ion Rechargeable Batteries

## Batteries Based on Small Format Li-ion Cells (18650)

Mission	Launch Date	Battery Configuration	Manufacturer	Cell Size, or Model	Capacity (Ah) Rated / Actual	Operating Voltage Range	Battery Mass (kg)	Specific Energy (Wh/kg)	Operating Temperature Range (°C)	Calendar Life (Years)	Cycle Life To-Date
Kepler	3/6/09	8s16p	ABSL	Sony 18650	24 / 20	25V - 33.4V	6.5	90	-10° to 45°C	6	< 2,500
Aquarius	6/10/11	4 x 8s20p	ABSL	Sony 18650	30 / 28	24V - 33.6V	4 x 8.5	95	-10° to 40°C	7.5	~ 6,500
SMAP	1/31/15	8s52p	Energys/ABSL	Sony 18650	78 / 54	24V - 32.8V	20.40	80	10° to 25°C	4.3	< 1,000
SMAP (LVA)	1/31/15	3 x 8s10p	Energys/ABSL	Sony 18650	45 / 32	24V - 32.8V	3 x 4.15	75	0° to 35°C	4.3	< 1,000


### Limitations of SOP Li-ion batteries:

- Heavy and bulky
- Limited operating temperature range (-20°C to 40°C)
- Limited cycle and calendar life.



## Background

- Planetary Science Division (PSD) of NASA-SMD requested an assessment of advanced space solar power and energy storage systems that will enable/enhance the capabilities of future Planetary Science Missions (> 2025).
- Solar Power Systems:
  - Solar Cells
  - Solar Arrays
- Energy Storage Systems:
  - Batteries
  - Fuel Cells
  - Capacitors
  - Flywheels



# Background