


Electroluminescence Imaging: A Quantitative Characterization Technique to Measure Dust Occlusion of Solar Cells

Meghan Bush, Timothy J. Peshek – *NASA Glenn Research Center*

Roselin Campos, Harry Yates, and Bran Tranter – *Maxar Space Systems*



Dust vs Solar Arrays

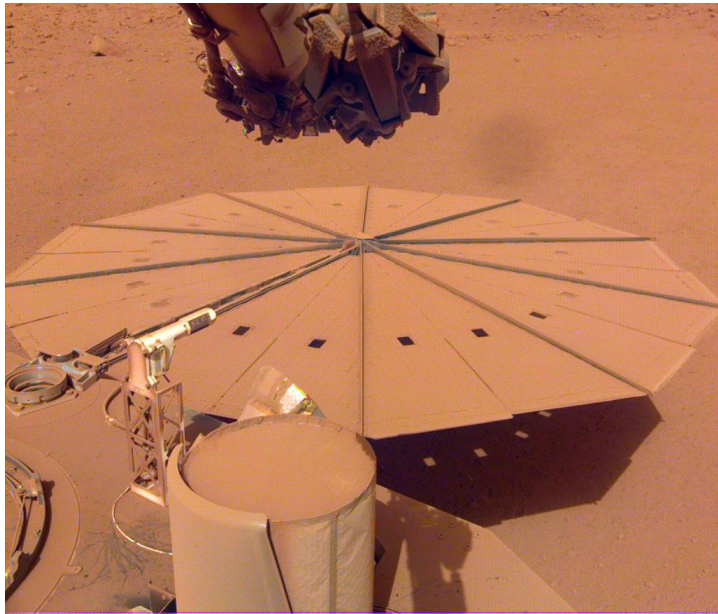

Mars
InSight
Lander

Image courtesy of NASA/JPL-Caltech/Cornell

Image courtesy of NASA/JPL-Caltech

Mars Spirit
Rover
(MER-A)

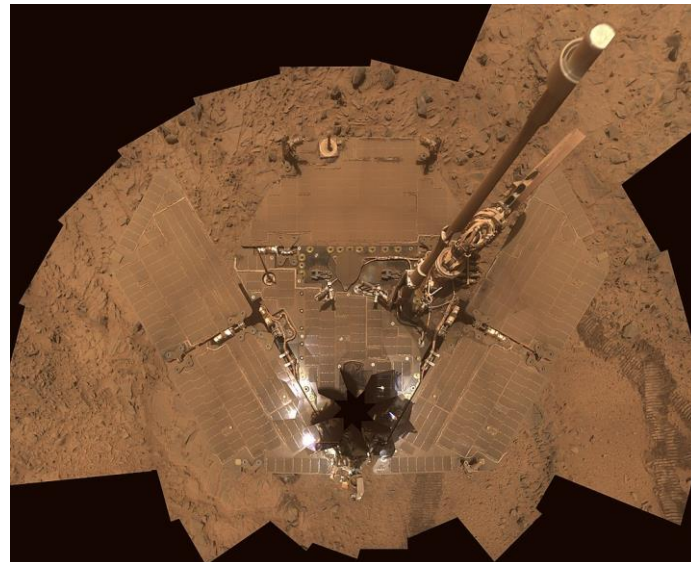


Image courtesy of David McKay, NASA/JSC

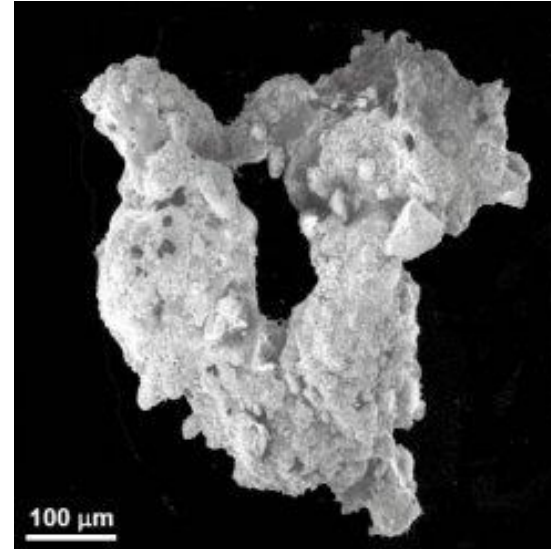


Image courtesy of NASA




- ◆ lunar dust sticks to exposed surfaces
- ◆ **dust adherence dominated by electrostatic forces**
- ◆ dust accumulation limits power
- ◆ no cleaning events like Martian arrays

Dust mitigation is crucial for arrays on the lunar surface.


Dust Mitigation



Electrodynamic Dust Shield

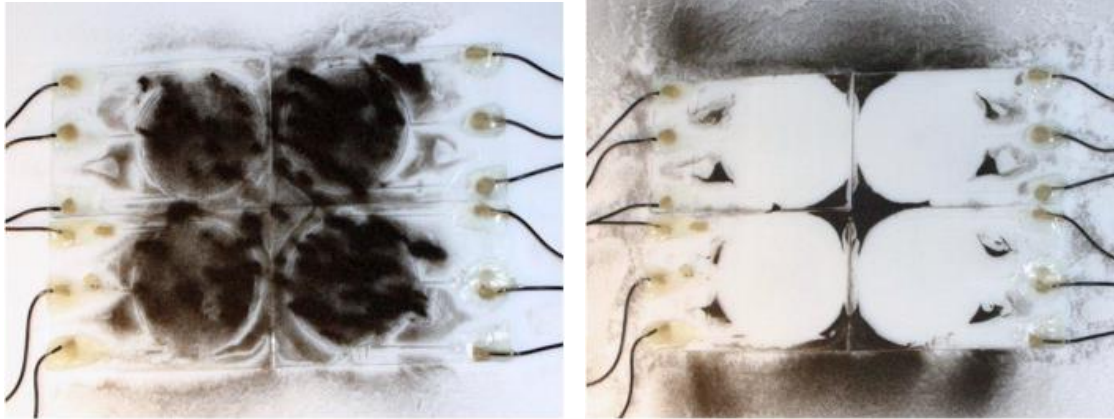

C.I. Calle, et al. *Active dust control and mitigation technology for lunar and Martian exploration*, Acta Astronautica, vol. 69, iss. 11–12, 2011, pg. 1082-1088, ISSN 0094-5765, DOI: 10.1016/j.actaastro.2011.06.010.

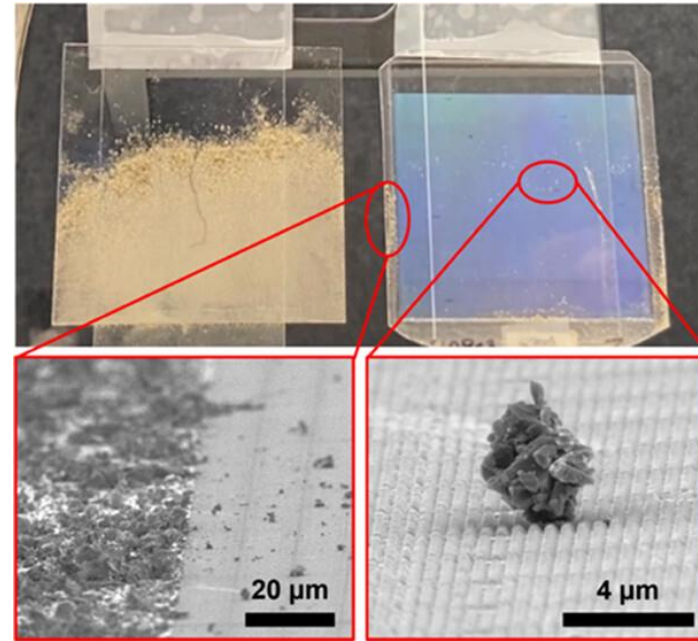


Large-Area Antidust Surfaces

Samuel S. Lee, et al., *Engineering Large-Area Antidust Surfaces by Harnessing Interparticle Forces*, ACS Applied Materials & Interfaces, 2023, 15 (10) ISSN 13678-13688 DOI: 10.1021/acsami.2c19211


GOAL: investigate vibromechanical dust removal for flexible arrays

- ◆ Flexible arrays present opportunity for unique dust mitigation strategy: vibration
- ◆ Piezoelectric motor converts electricity into a bending movement
 - ◆ Small piezo resonant frequency: 150Hz
 - ◆ Large piezo resonant frequency: 433Hz
 - ◆ Frequency sweep: 1Hz – 500Hz

Image courtesy of Maxar

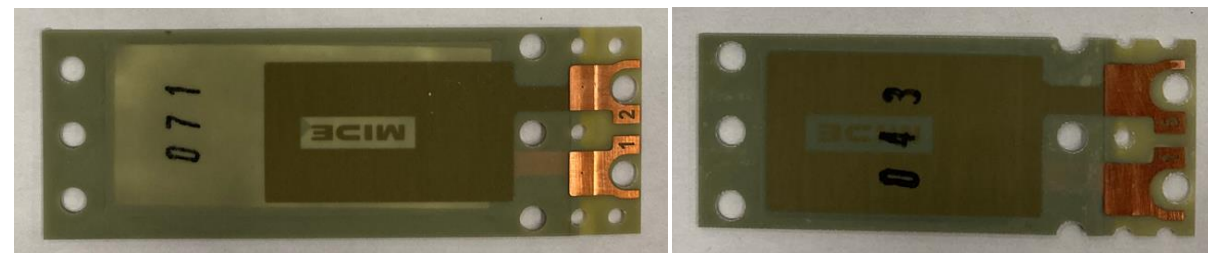



Electroluminescence Imaging



forward bias solar cell





solar cell emits light

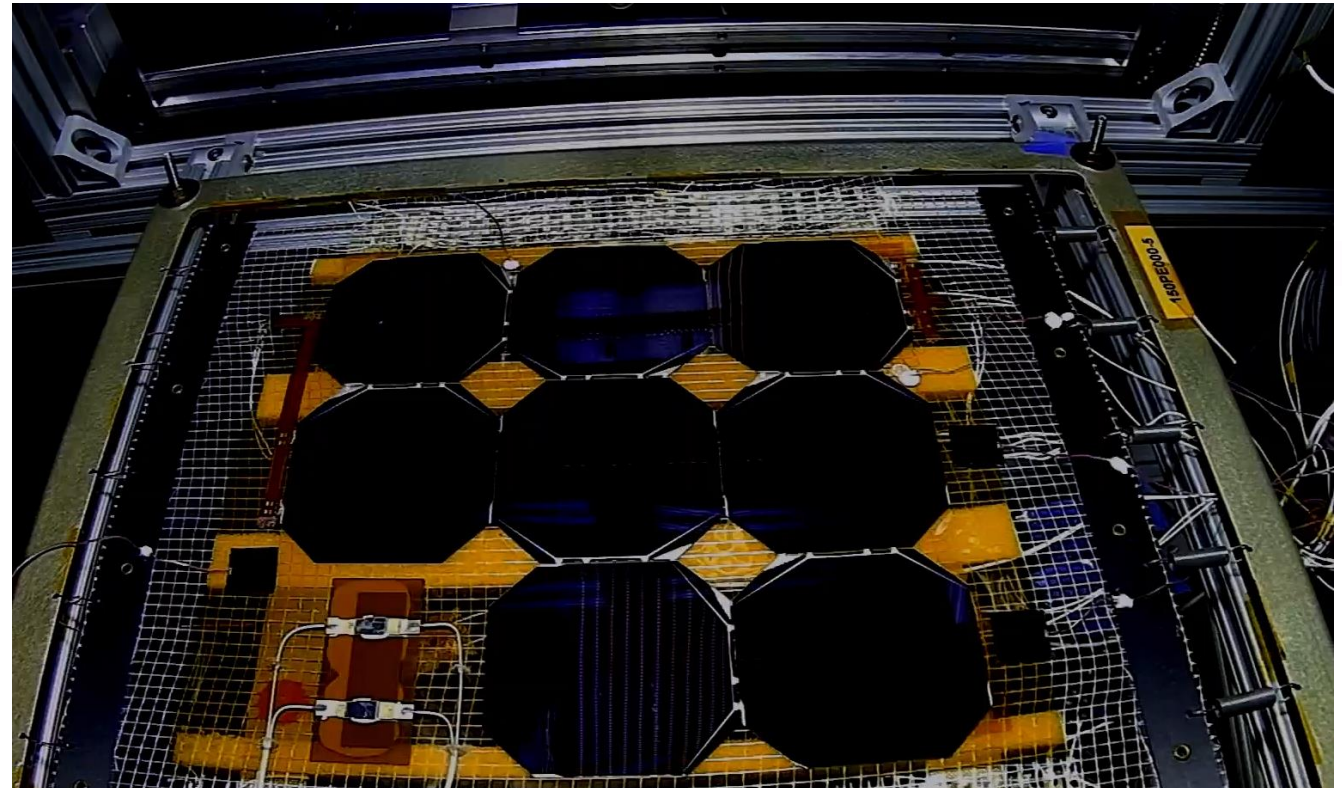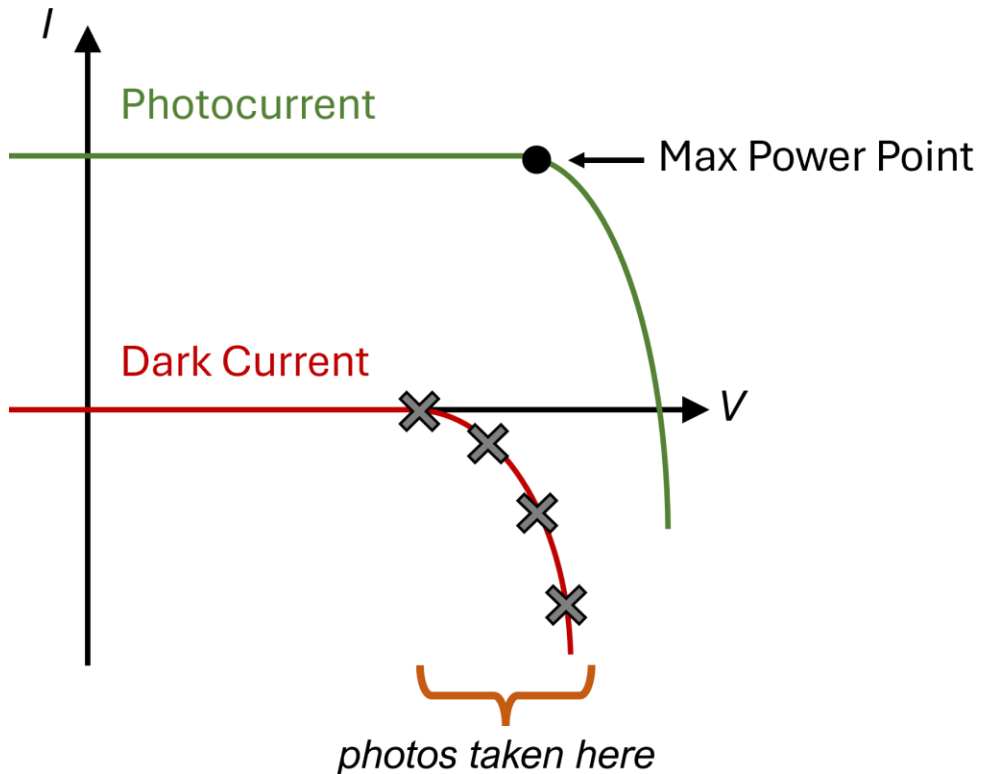

Electroluminescence Imaging







Sample 8 - Pristine

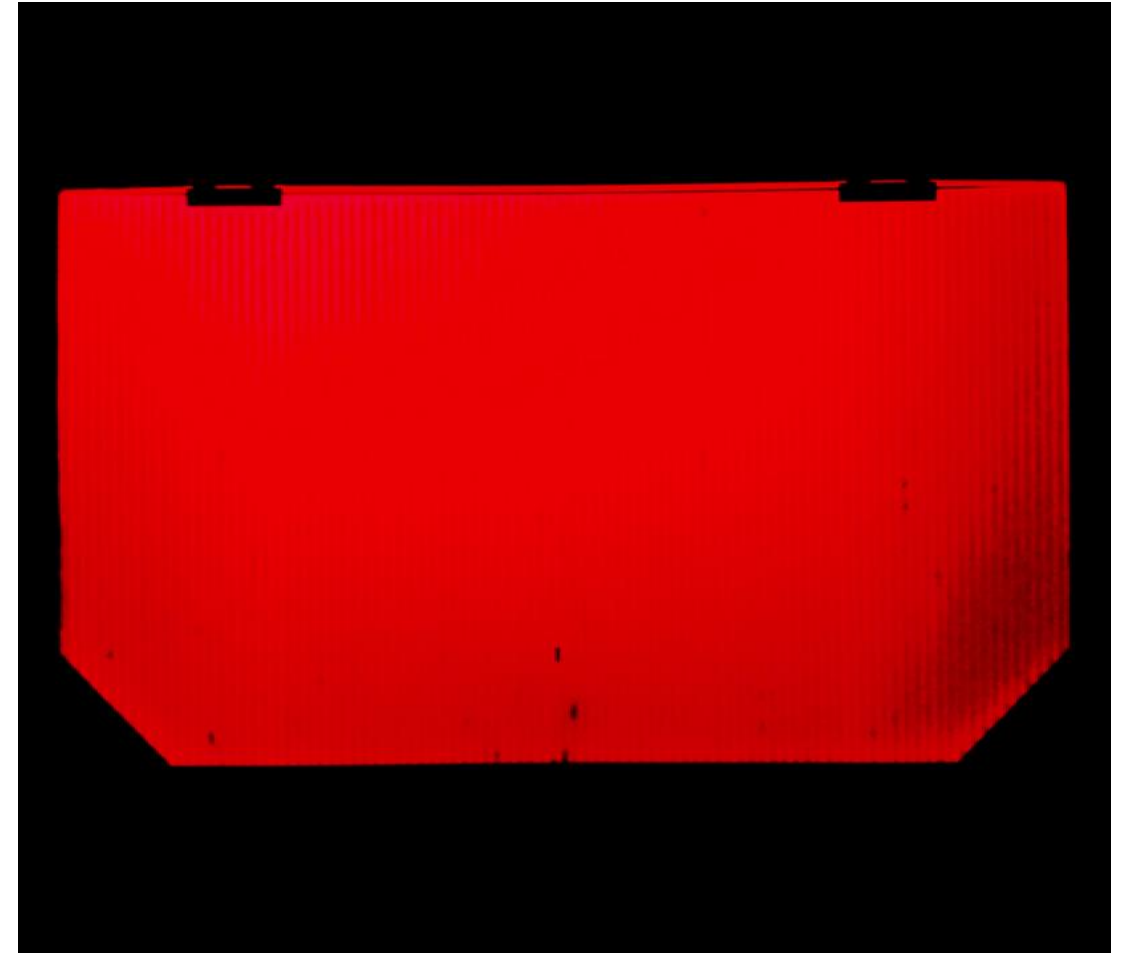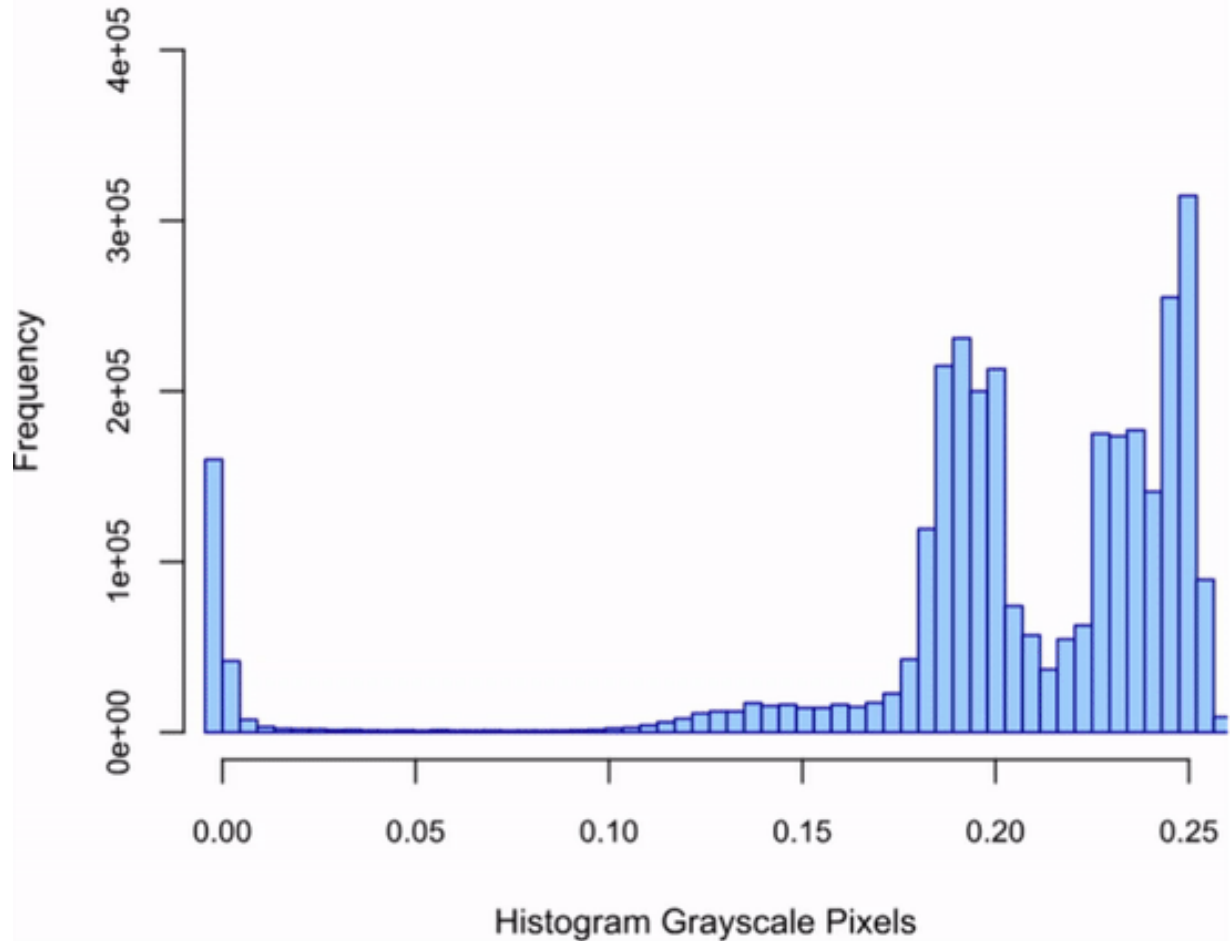

Dust Deposition System




- ◆ vibration motor excites a mechanical sieve loaded with lunar simulant
- ◆ designed to **raster** and **deposit dust** over full test article area

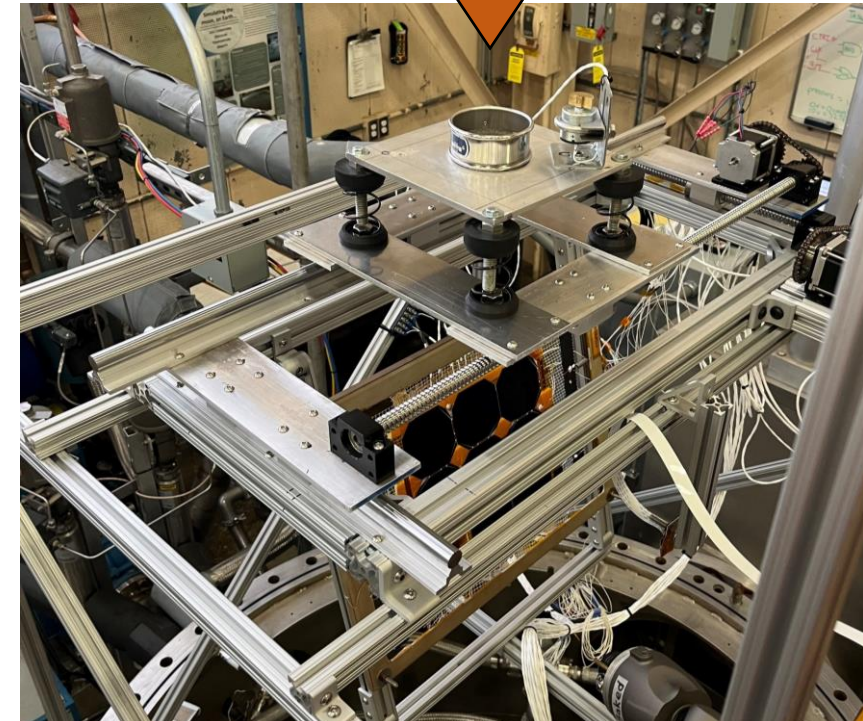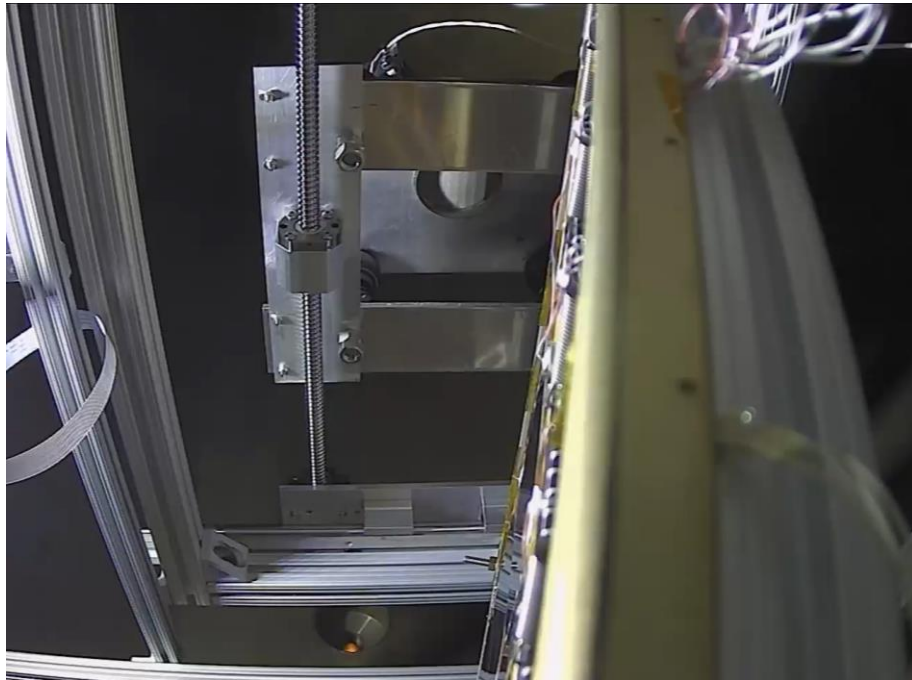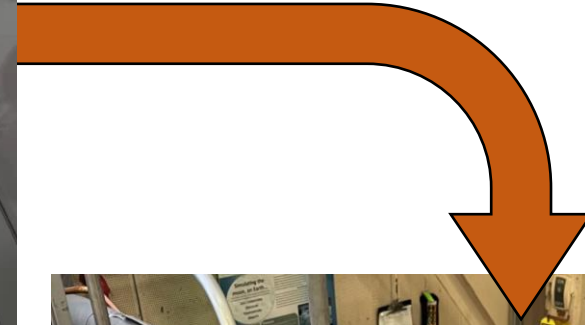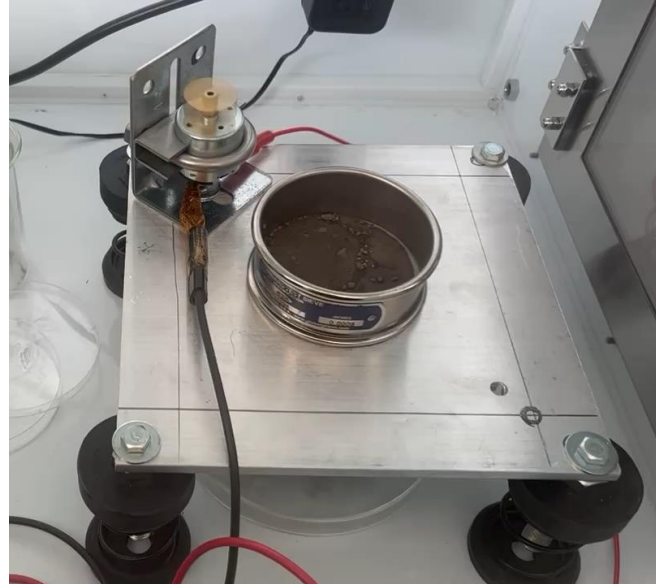

Test Articles




Coupon 1 – ROSA (ZTJ)

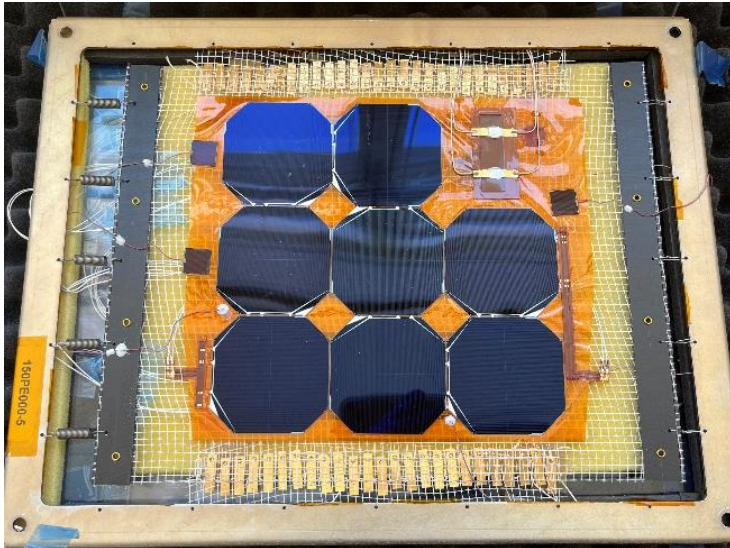


- ◆ Rocket Lab ZTJ cells
- ◆ bonded to flexible mesh
- ◆ 4 piezos on back

Coupon 2 – MicroLink IMM

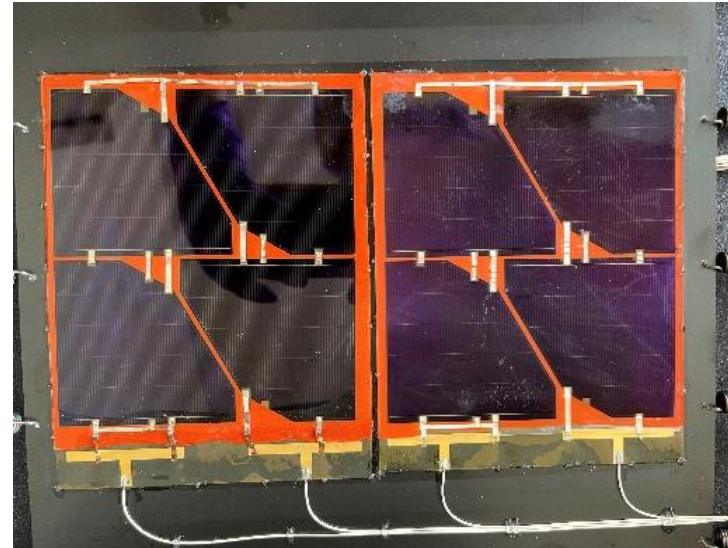


- ◆ MicroLink IMM cells
- ◆ bonded to black Kapton-coated glass fiber composite
- ◆ 4 piezos on back

Coupon 3 – mPower Si

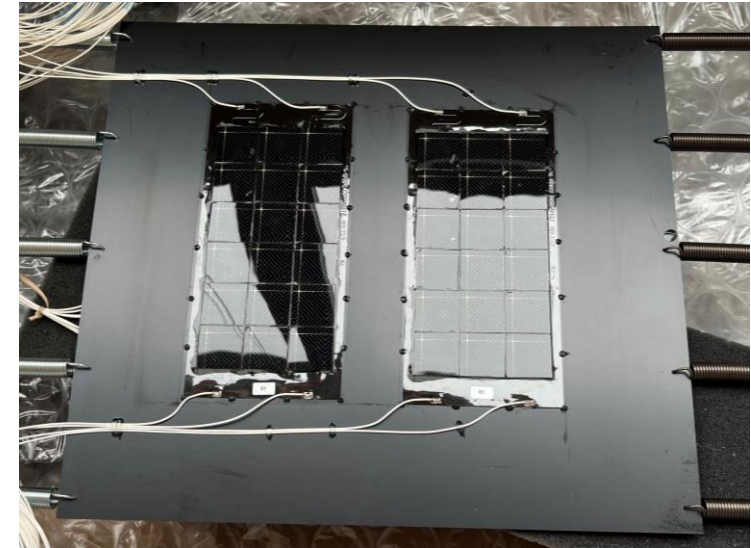


- ◆ mPower Silicon cells
- ◆ bonded to black Kapton-coated glass fiber composite
- ◆ 4 piezos on back

Test Articles - EL



Coupon 1 – ROSA (ZTJ)

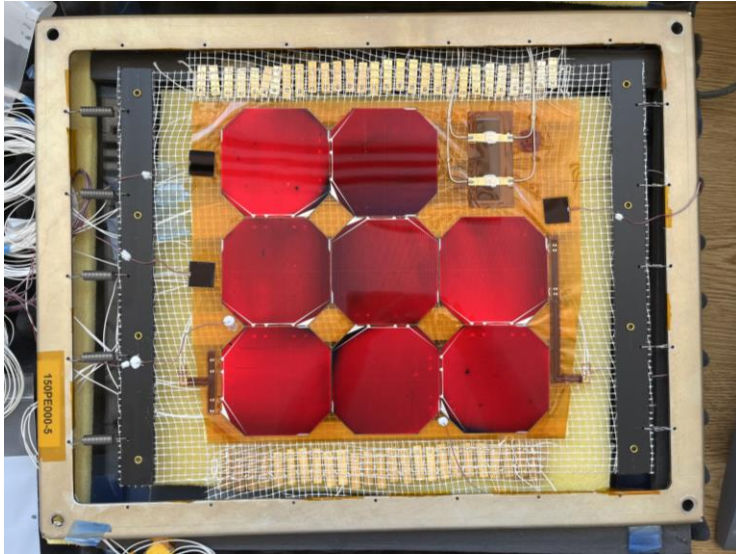


- ◆ Sol Aero ZTJ cells
- ◆ bonded to flexible mesh
- ◆ 4 piezos on back

Coupon 2 – MicroLink IMM



- ◆ MicroLink IMM cells
- ◆ bonded to black Kapton-coated glass fiber composite
- ◆ 4 piezos on back

Coupon 3 – mPower Si

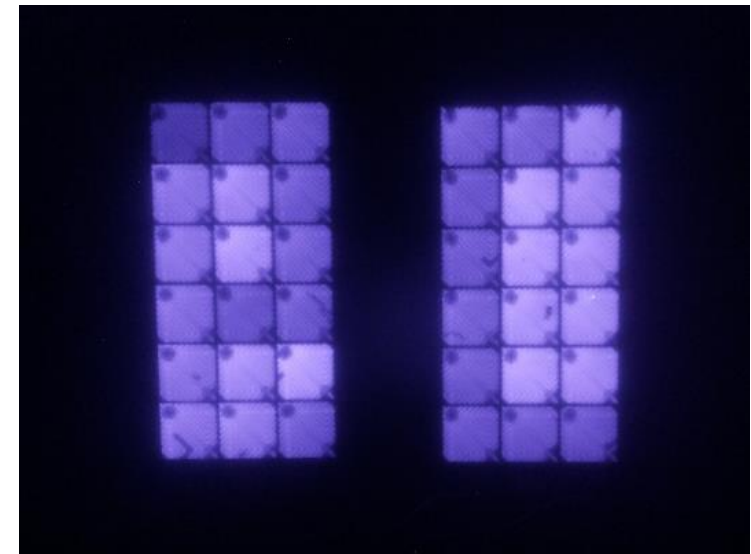


- ◆ mPower Silicon cells
- ◆ bonded to black Kapton-coated glass fiber composite
- ◆ 4 piezos on back

Test Facilities: VF-20



- ◆ Spacecraft charging investigations
- ◆ Derive surface charging range for dust tests
- ◆ Testing done for **GEO conditions** (worst-case scenario for the lunar surface)


Slow motion capture, 0.25x speed

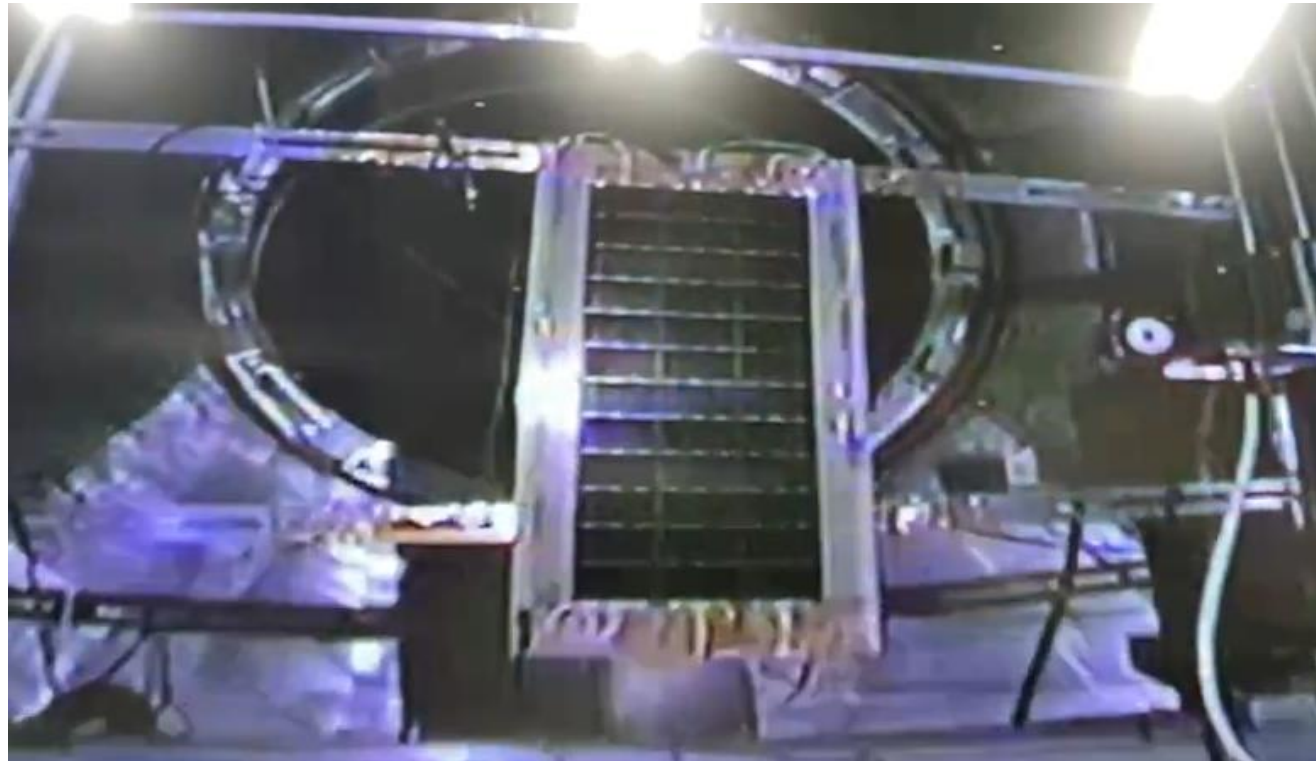


Test Facilities: VF-13






- ◆ VF-13 tests dust deposition system, solar array test coupon, and EL imaging hardware under vacuum
- ◆ System has a slow roughing pump to minimize simulant pluming in the e-1/-2 torr range
- ◆ HV supply simulates surface charge buildup on array

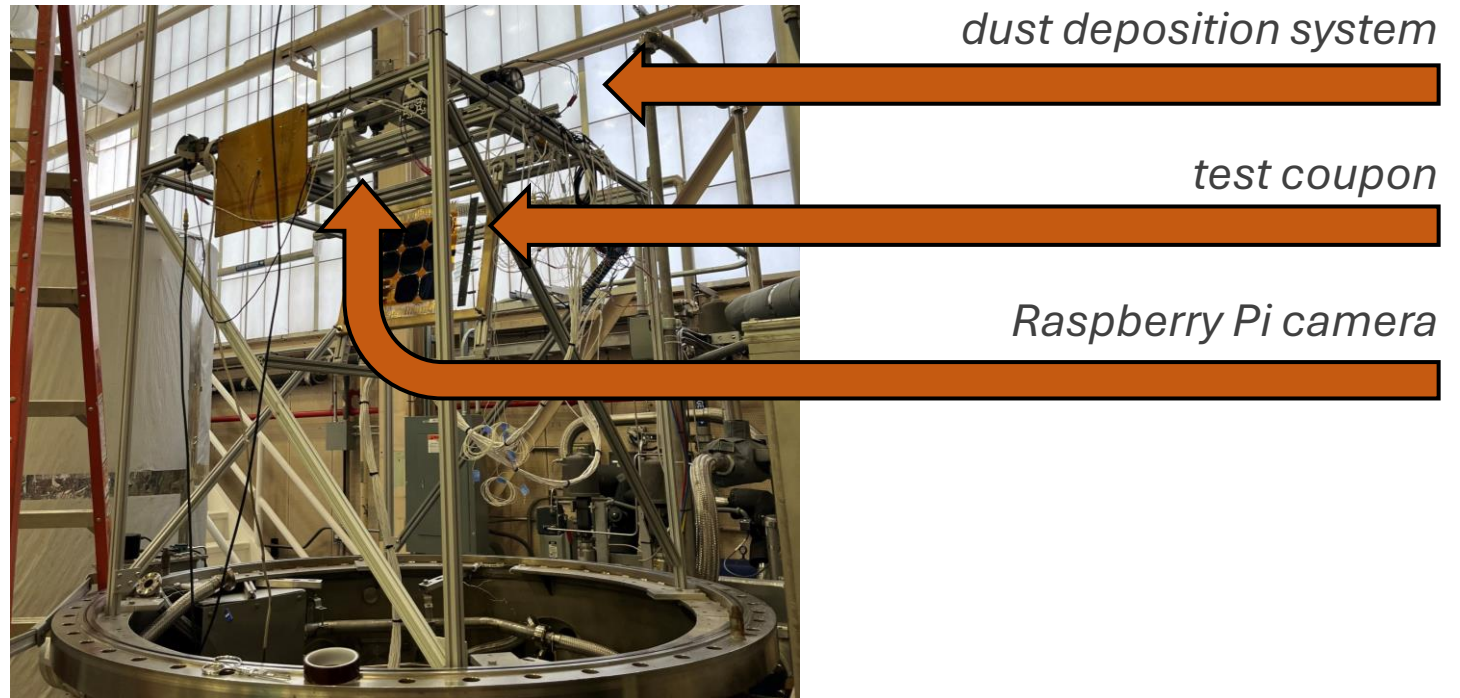


Test Overview

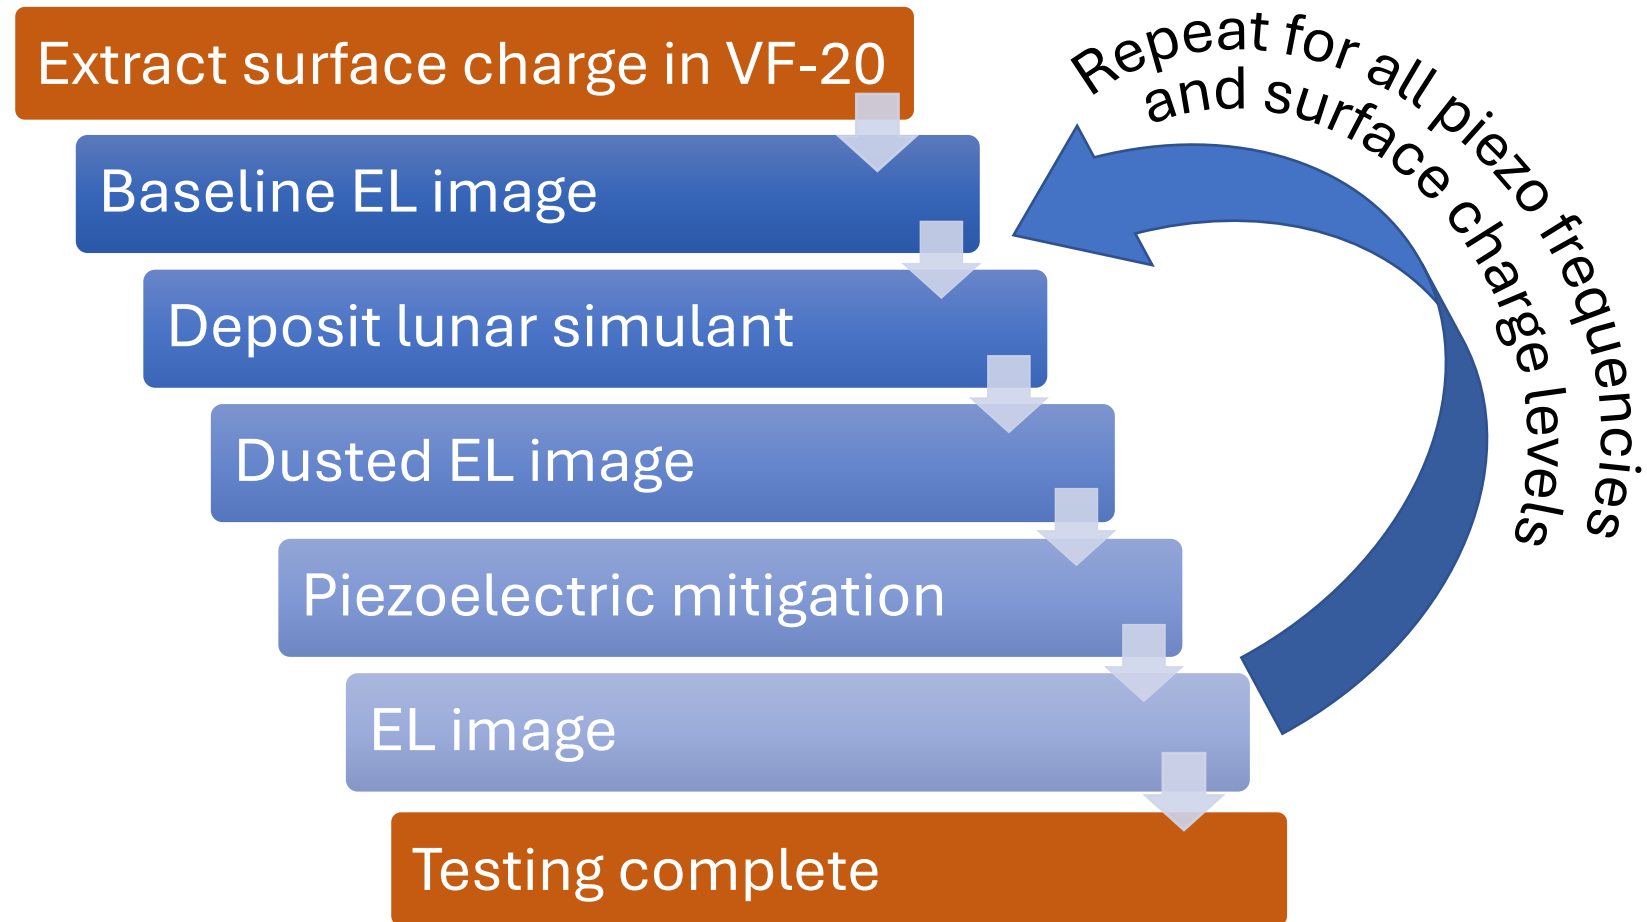

Coupon 1 Result

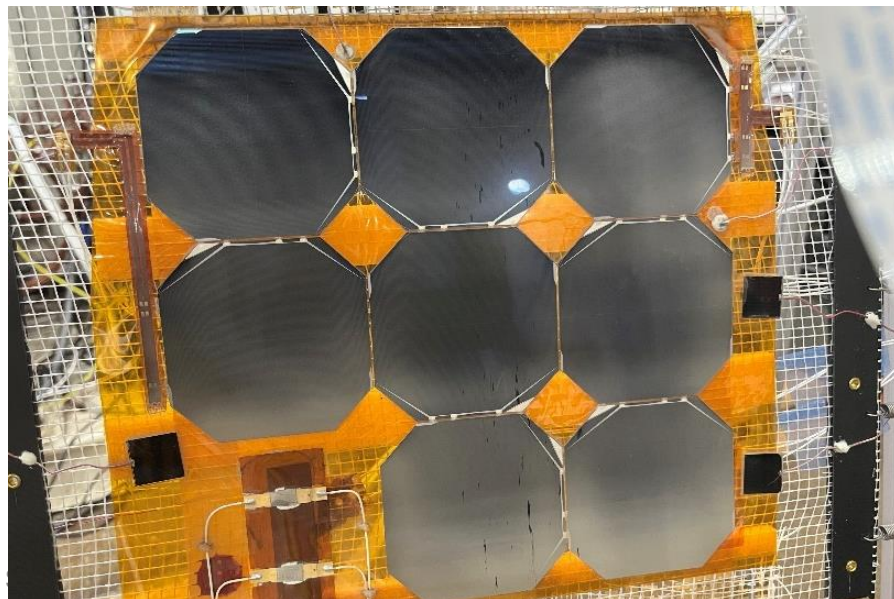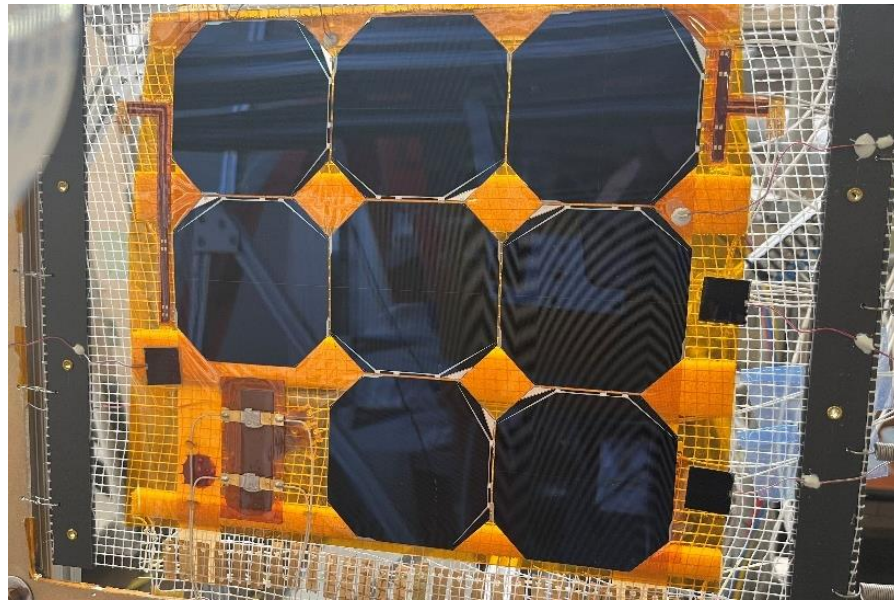


-450V Surface Charge - Pristine vs. Freq Sweep

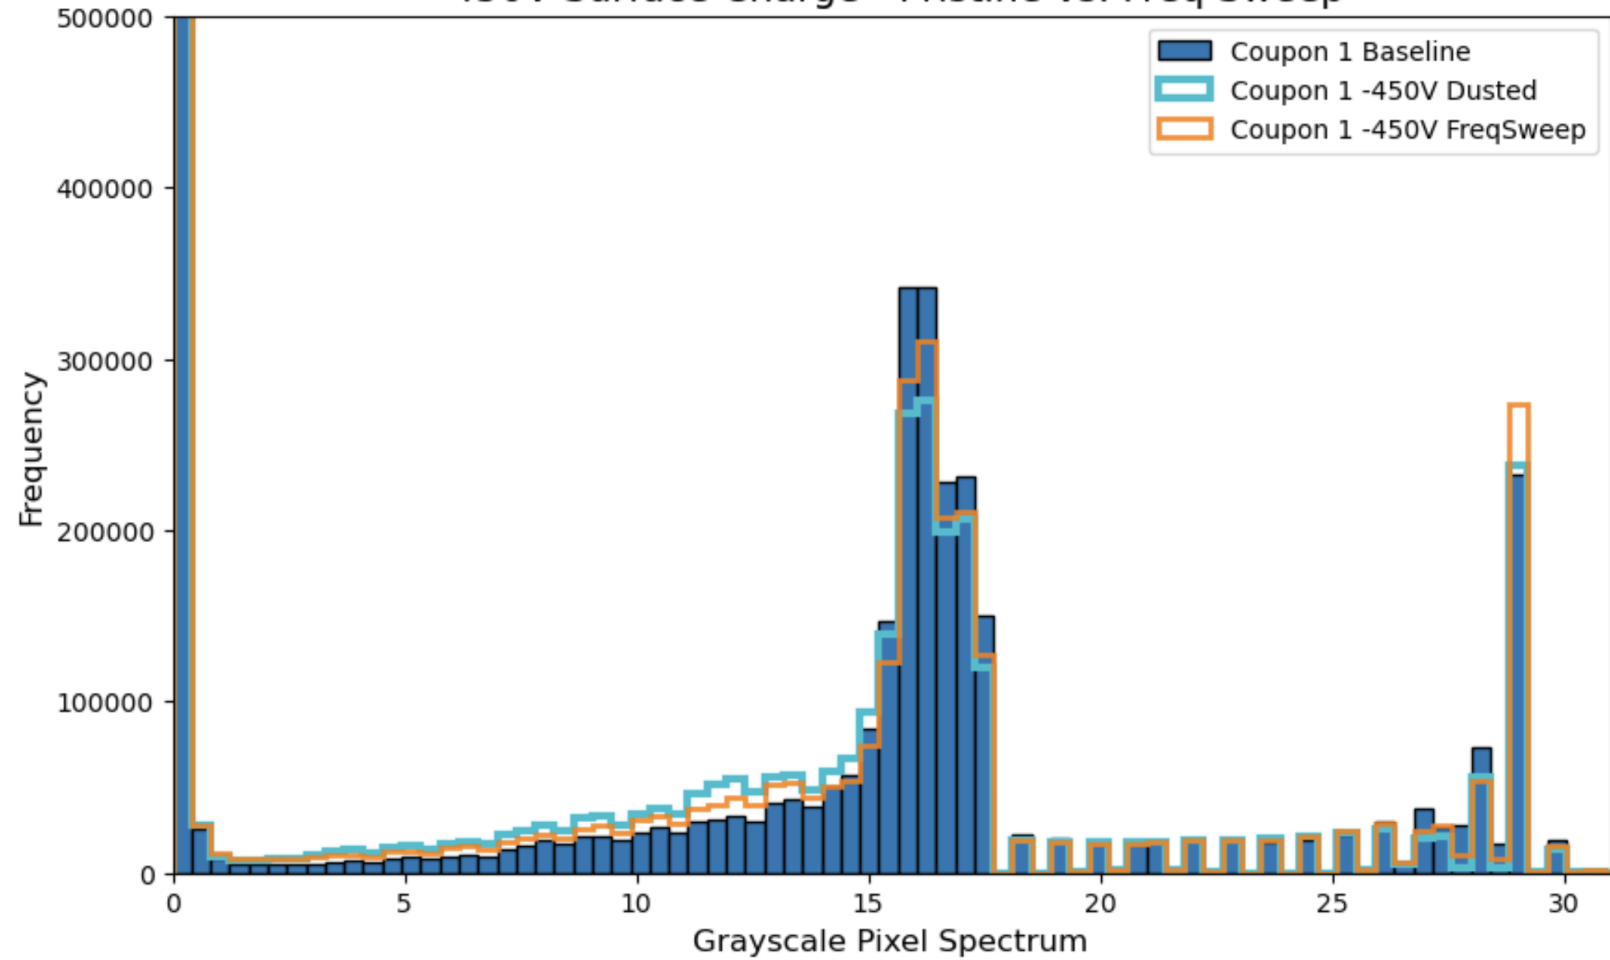


% diff. Dusted: **8.22**

% diff. FreqSweep: **2.02**

Coupon 2 Result

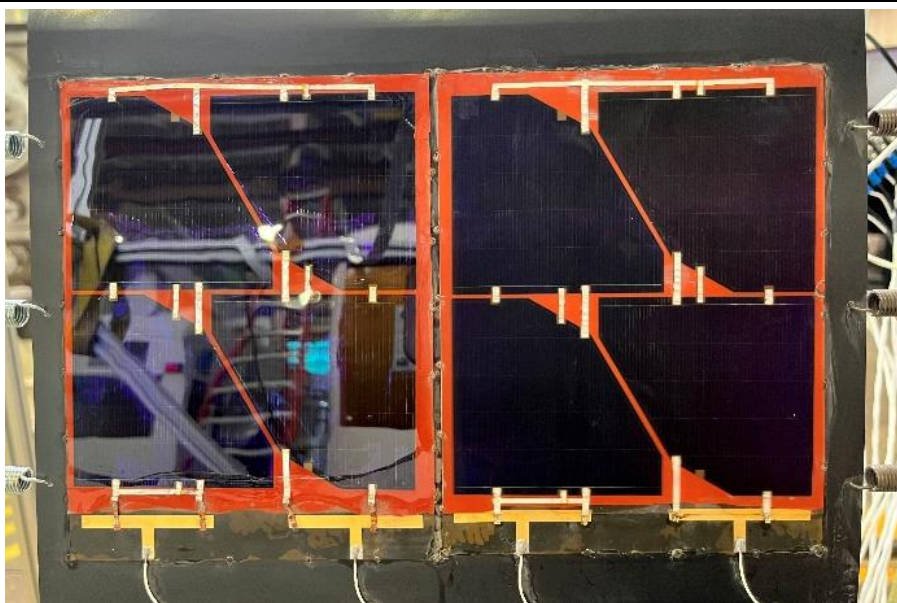



-450V Surface Charge - Pristine vs. Freq Sweep

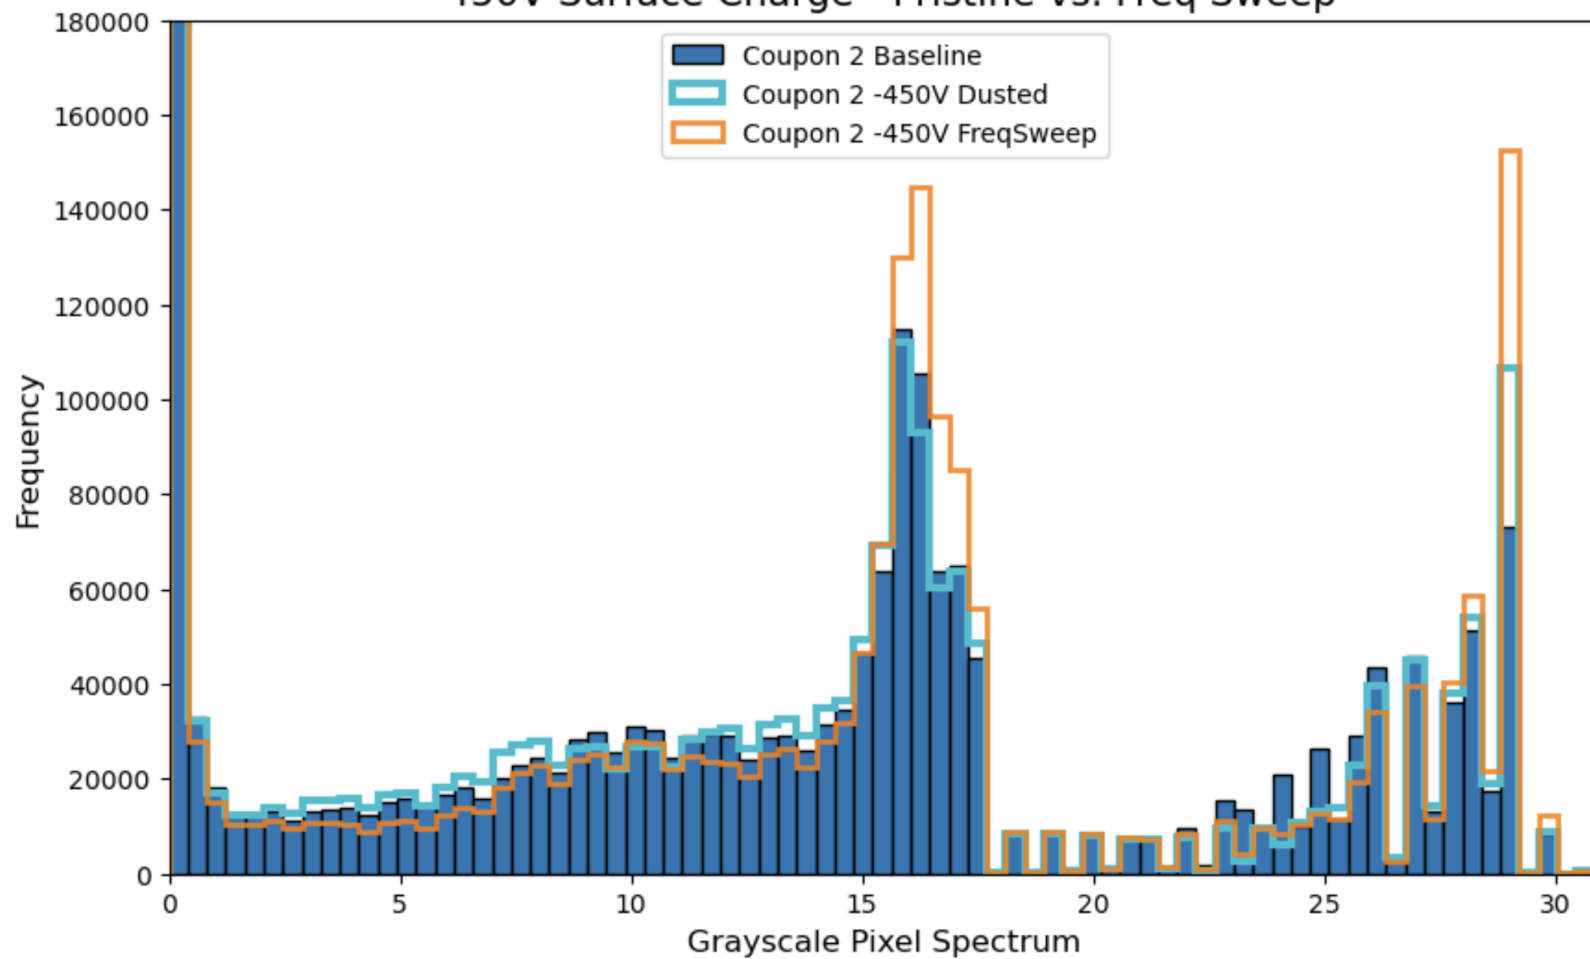


% diff. Dusted: **9.82**

% diff. FreqSweep: **10.89**

Coupon 3 Result

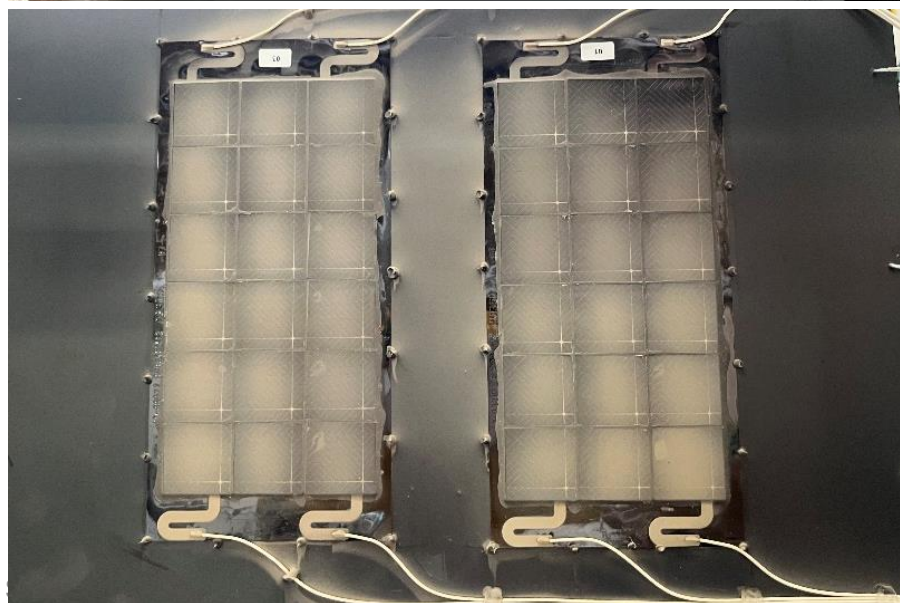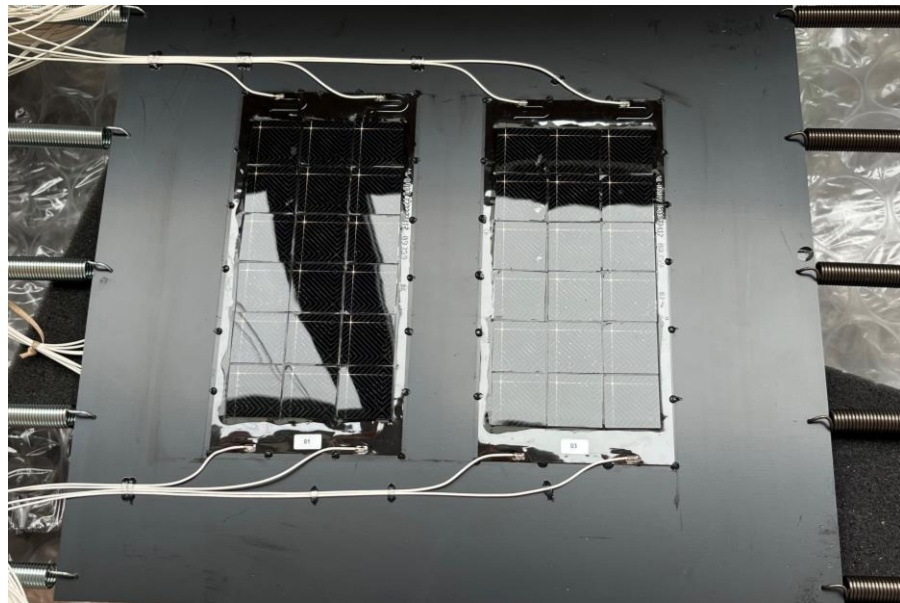


-450V Surface Charge - Pristine vs. Freq Sweep

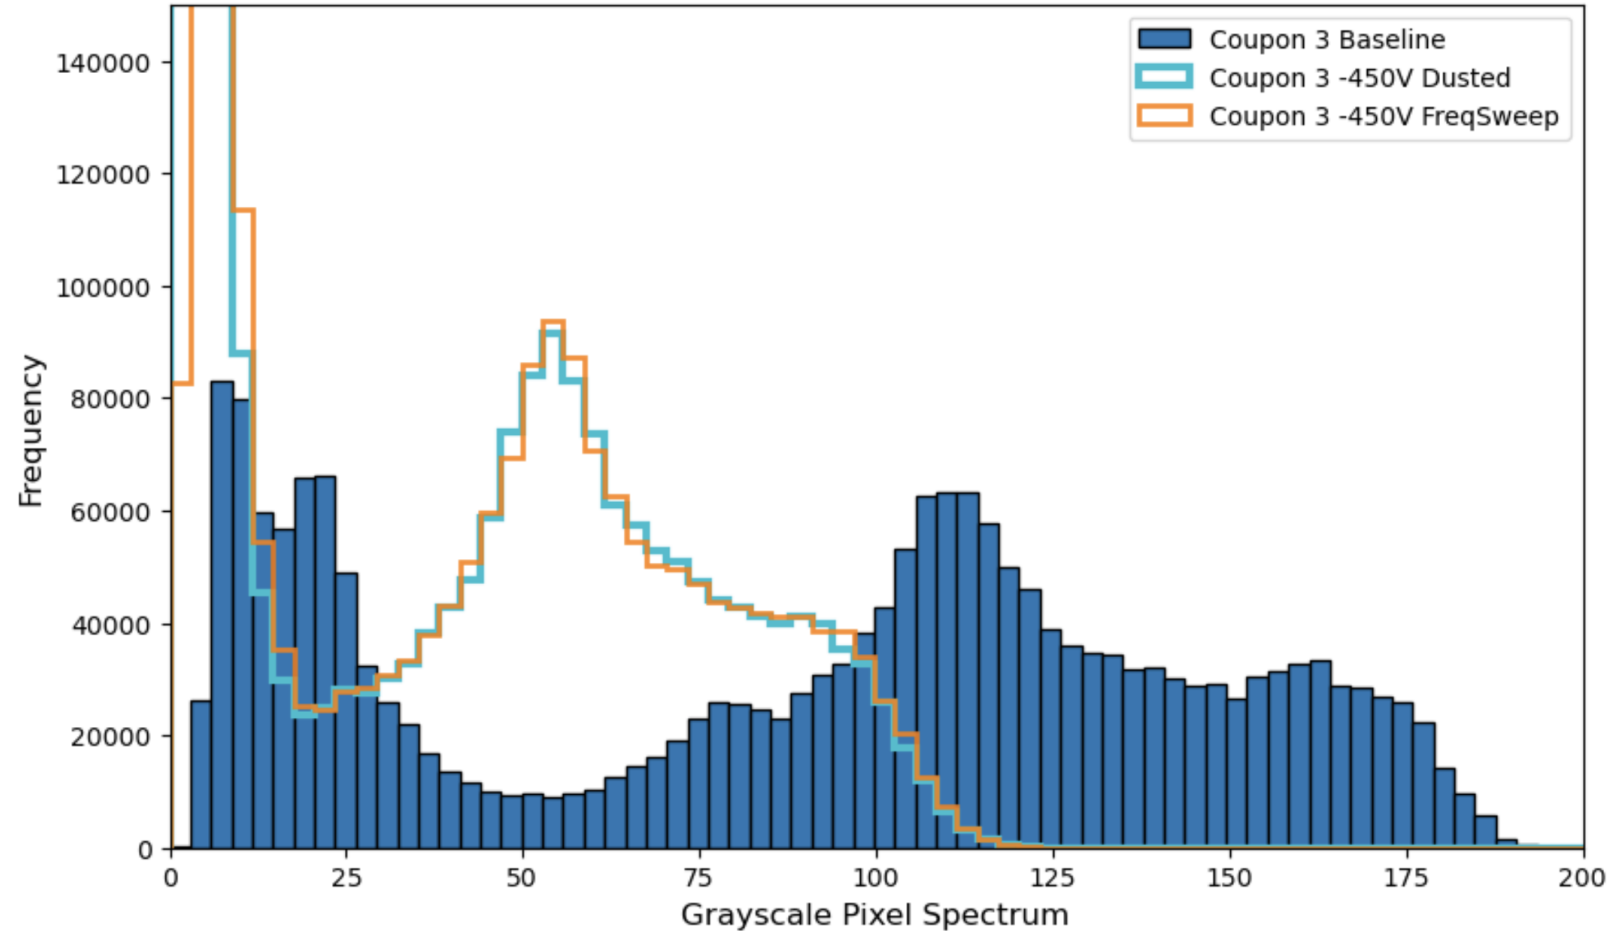

% diff. Dusted: **1848.09**

% diff. FreqSweep: **1009.16**

Lessons Learned



Sieve Size Matters

- ◆ smaller mesh sizes not compatible with vacuum deposition

EL Imaging Scalability

- ◆ EL is highly sensitive on the cell level
- ◆ array architecture differences and camera limitations hinder EL scalability (for now)

Adhesion Depends on Charge

- ◆ at ambient, water drives adhesion
- ◆ in vacuum, limited dust sticking to array under zero bias

Simulant Preparation

- ◆ un-baked simulant experiences major clumping in vacuum
- ◆ hot plate bakeout is not suitable

Potential Forward Work



- ◆ Expand upon testing with additional variables:
 - ◆ temperature
 - ◆ array tilt
 - ◆ simulant charging mechanism
 - ◆ simulant type
- ◆ Test additional coupons and vary:
 - ◆ cell technology
 - ◆ substrate
 - ◆ **dust mitigation technology → linear actuators**
- ◆ Test compatible technologies (i.e., radiator with thermal imaging)
- ◆ **Investigate impact of dust grain size/type on cell performance**

Acknowledgements



- ◆ NASA STMD: Game Changing Development Program
 - ◆ *DMFlex ACO – 20 – 20 ACO Final – 0020*
- ◆ GRC Project Managers: **Erica Montbach** and **Jenna Fothergill**
- ◆ Solar cell providers:






Questions?




backup slides


Silicon's Brief Recovery




100V Surface Charge - Freq Sweep

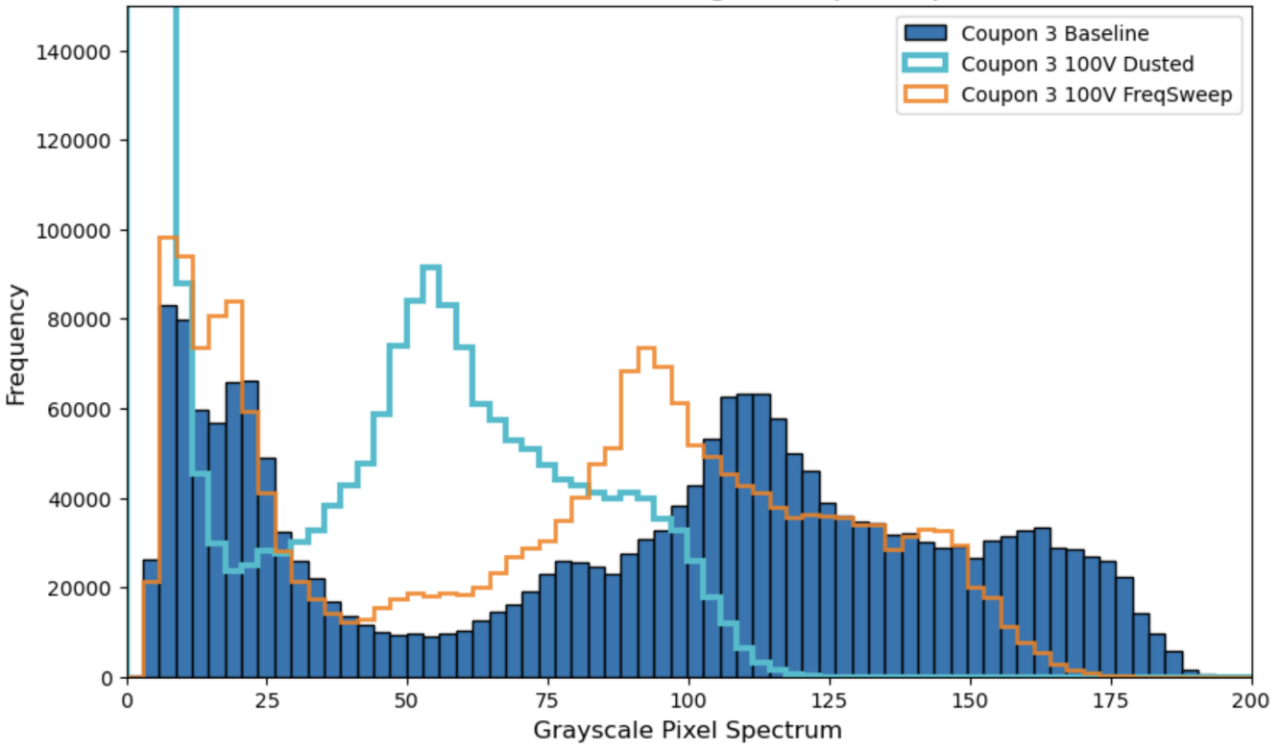

0V Surface Charge - Freq Sweep

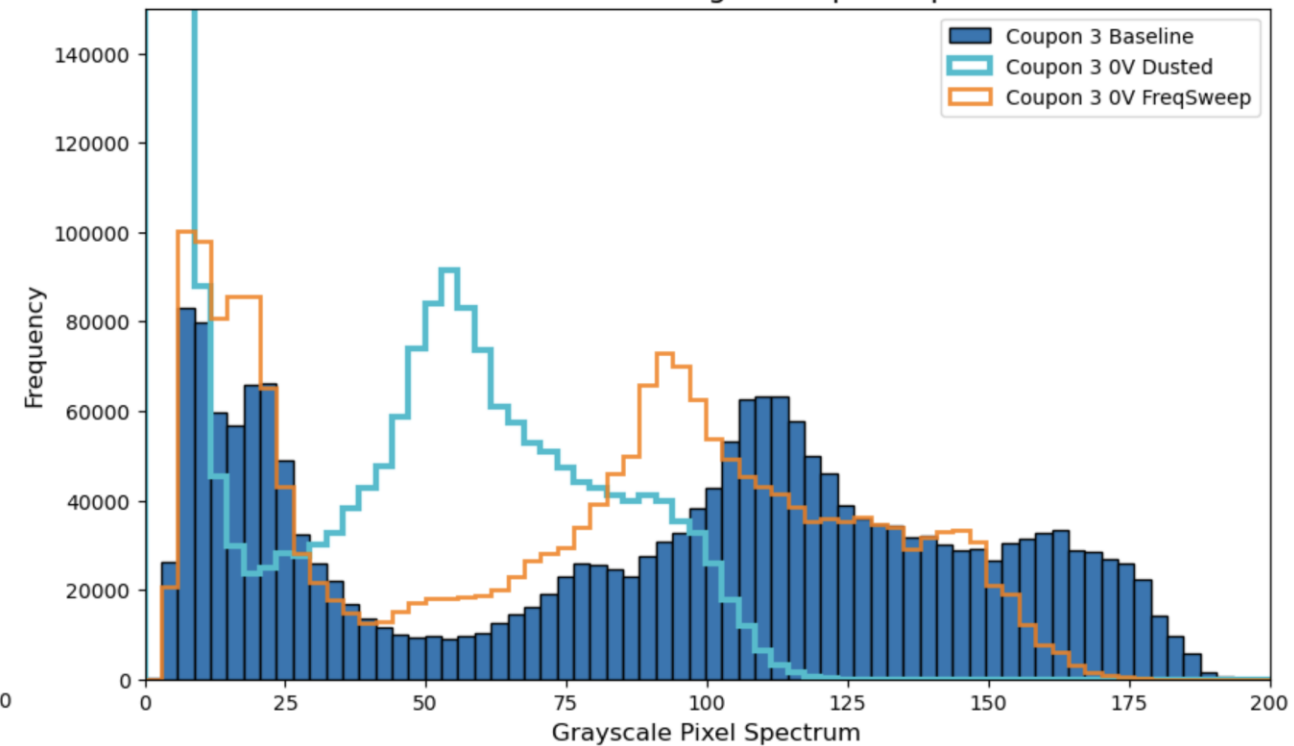

Silicon's Brief Recovery

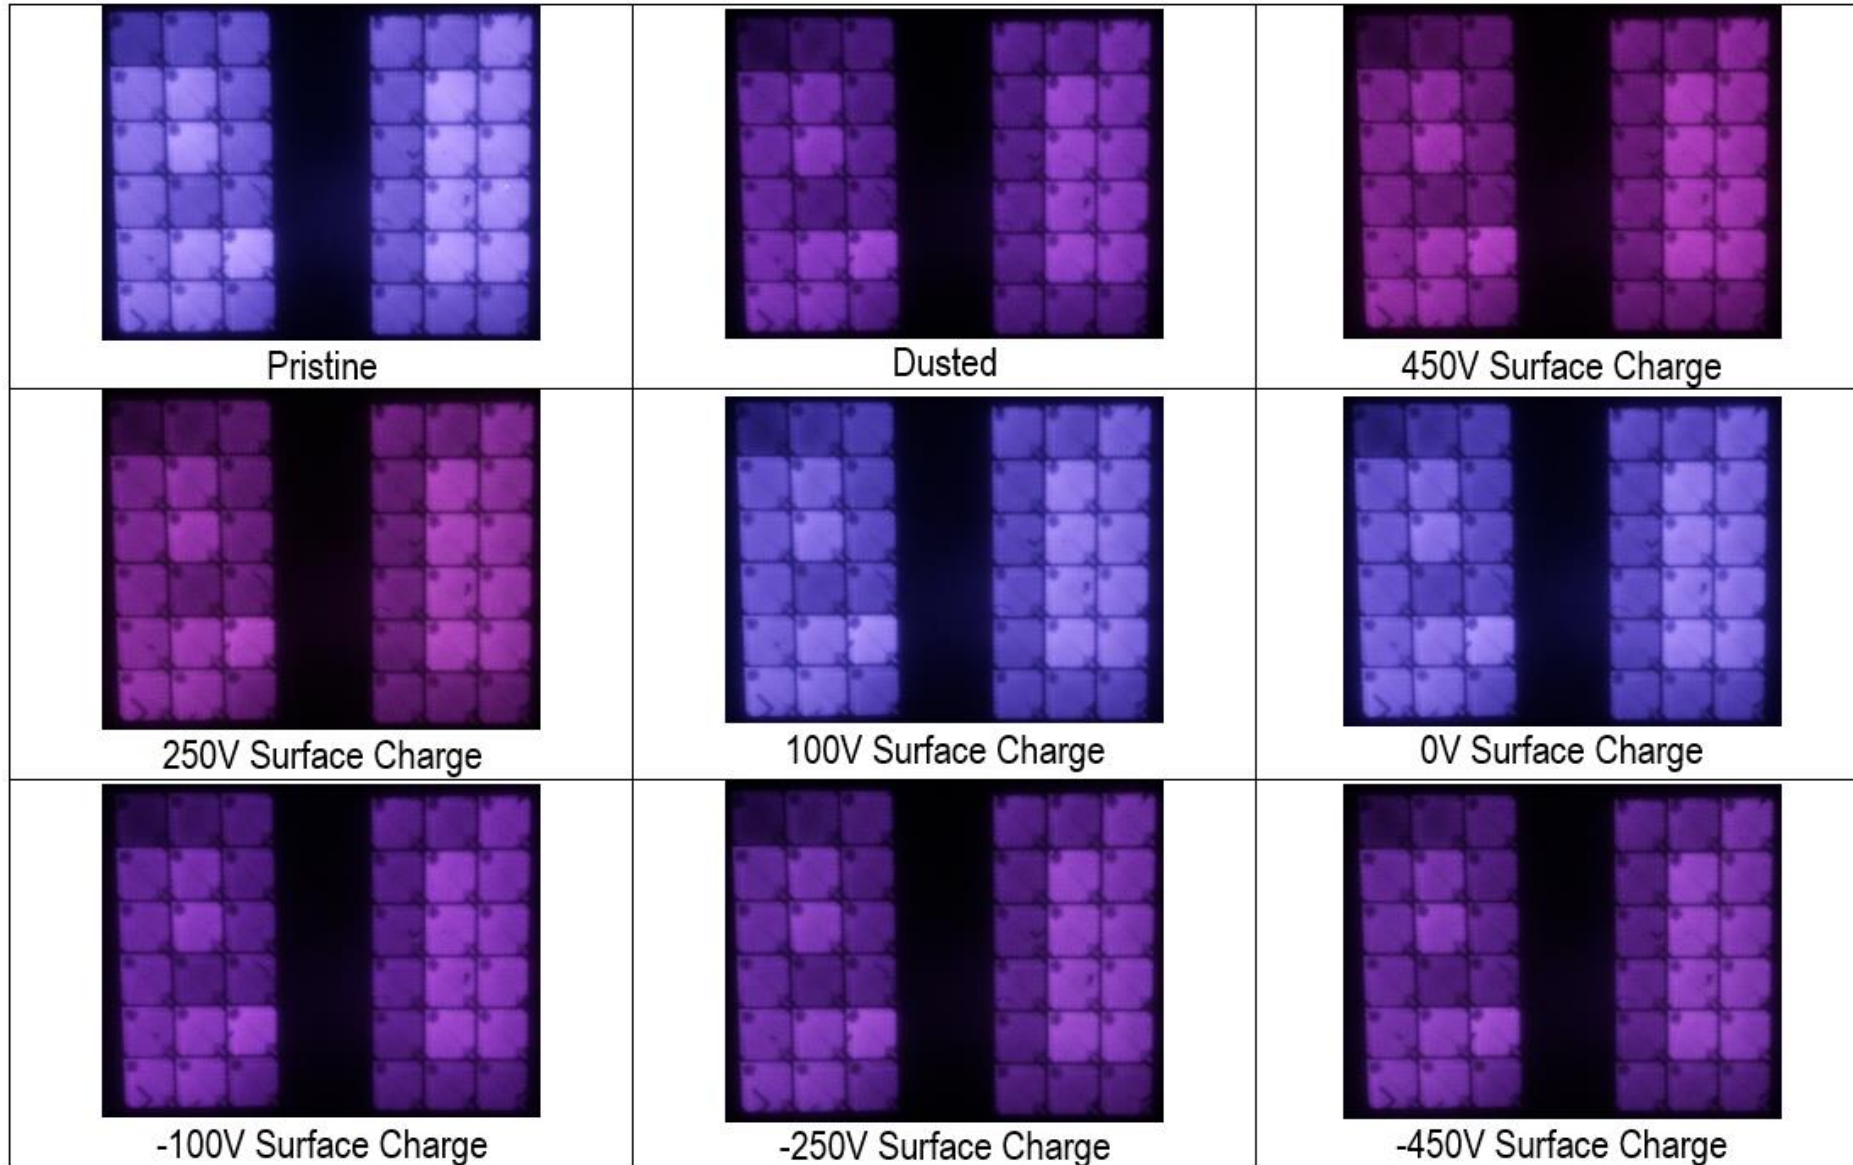

Dust Deposition

